
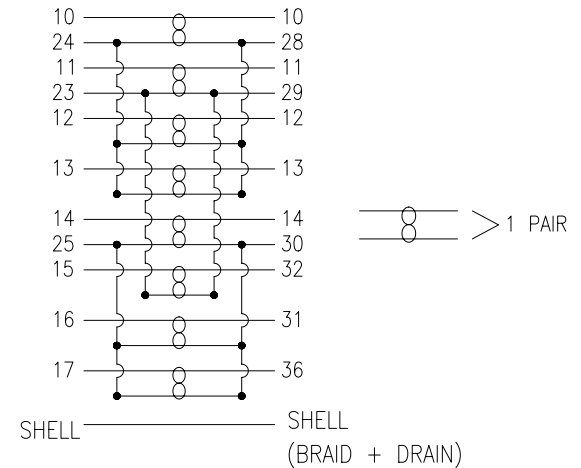


P/N	XX(FT)	L(MM)	TOLERANCE(MM)
1284-D25C36-03	03	914	+50/-0
1284-D25C36-06	06	1829	+75/-0
1284-D25C36-10	10	3048	+75/-0
1284-D25C36-15	15	4572	+75/-0

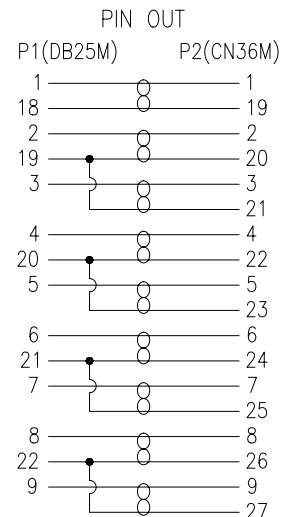

NOTE:

- CABLE: 28AWG X 18PAIRS(INSULATION: P.P, CONDUCTOR OD= $\varnothing 0.62 \pm 0.05\text{mm}$) AL-FOIL AND BRAID(85%),SHIELDED WITH DRAIN WIRE,UL20276 (IEEE 1284), BEIGE(BG-03) PVC JACKET, MARKING ON PVC JACKET INCLUDE "IEEE 1284-1994 COMPLIANT" ALONG ITS LENGTH. OD= 8.0 ± 0.15
- CONNECTOR: P1: D-SUB 25PIN MALE, SOLDER TYPE, GOLD FLASH CONTACTS. P2: CENTRONICS 36PIN MALE, SOLDER TYPE, GOLD FLASH CONTACTS.
- THUMB SCREW TO BE MOLDED BEIGE(BG-02).
- SHIELDING:COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONTACTOR SHELL & BRAID
- ALL HOOD: MOLDED BEIGE(BG-02) PVC.
- TESTING:100% ELECTRICAL TESTING.

NET MECHANISM Corp			
www.cabling-ol.net			
SCALE	NONE		REV A
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	11/13/04		
TITLE			
DB25M TO CN36M			
PART NO.			
1284-D25C36-XX			