


P/N	XX(FT)	L(MM)	TOLERANCE(MM)
1394-44G-03	03	914	+50/-0
1394-44G-06	06	1829	+75/-0
1394-44G-10	10	3048	+75/-0

NOTE:

- 1.CABLE:UL20276 1394 CABLE,(30AWG\*1P+AL/MYLAR+BRAID SHIELD)\*2+FILLER+TRANSPARENT MYLAR+AL/MYLAR+BRAID (A-M ALLOY)SHIELDED WITH DRAIN WIRE(BARE COPPER), JACKET: BLACK PVC OD:5.4±0.15MM.
- 2.CONN.:P1&P2,IEEE 1394 4P PLUG,SOLDER TYPE,BLACK PBT INSULATION,GOLD PLATED CONTACTS,GOLD PLATED SHELL.
- 3.OUTER MOLDED BLACK PVC.MOLD NO:1394-0401
- 4.TESTING:100% ELECTRICAL TESTING.

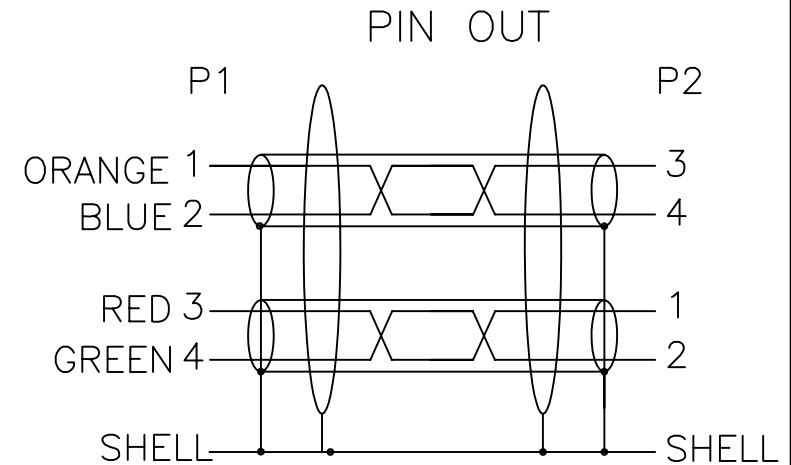

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/21/10			
TITLE				
1394 4M TO 1394 4M				
PART NO.				
1394-44G-XX				