

NOTE:

1. CABLE:UL20276 1394 CABLE,(30AWG*1P+AL/MYLAR+BRAID SHIELD)*2+FILLER+TRANSPARENT MYLAR+AL/MYLAR+BRAID (A-M ALLOY)SHIELDED WITH DRAIN WIRE(BARE COPPER), JACKET: BLACK PVC OD:5.4±0.15MM.
2. CONN.:P1:IEEE 1394 4P PLUG,SOLDER TYPE,BLACK PBT INSULATION,GOLD PLATED CONTACTS, NICKEL PLATED SHELL. P2:IEEE 1394 4PIN FEMALE,SOLDER TYPE,BLACK PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
3. NUT:M3.0 ϕ 5.5*2.4MM NICKEL PLATED
4. MOLDED:ALL HOOD MOLDED PVC BLACK
5. TESTING:100% ELECTRICAL TESTING.

PIN OUT

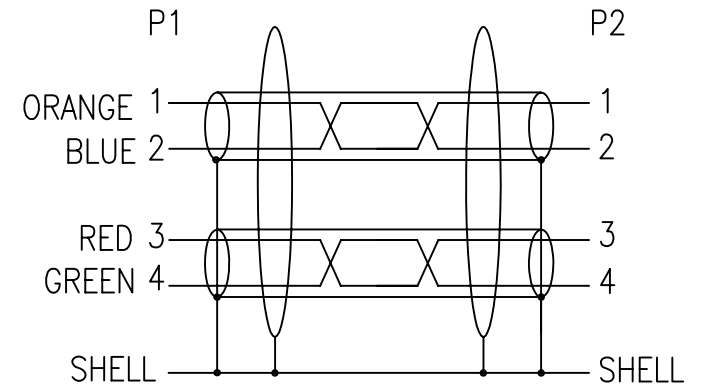


CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
1394-4M4PF-01	01	305	+15/-0
1394-4M4PF-03	03	914	+50/-0
1394-4M4PF-06	06	1829	+75/-0
1394-4M4PF-10	10	3048	+75/-0
1394-4M4PF-15	15	4572	+75/-0

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	C
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/21/10			
TITLE		1394 4M TO 1394 4F		
PART NO.		1394-4M4PF-XX		