


PIN OUT

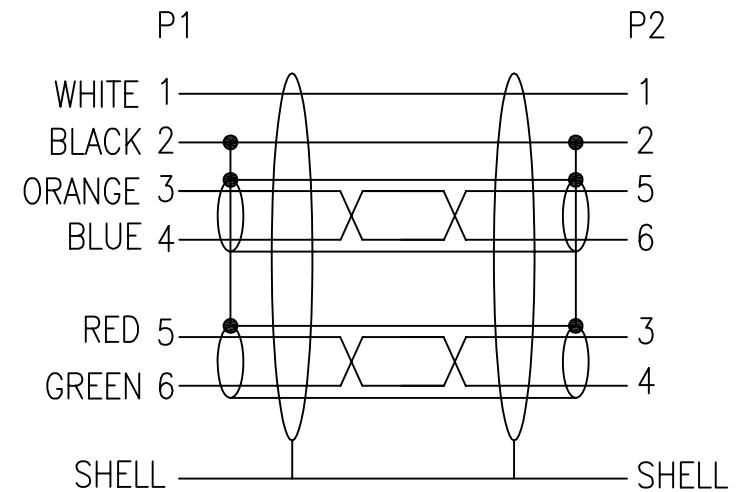

REMARK:

- 1.CABLE:UL20276 1394 CABLE,(28AWG\*1P+AL/MYLAR+BRAID SHIELD)\*2+22AWG\*2C+TRANSPARENT MYLAR+AL/MYLAR+BRAID SHIELD+JACKET:PVC COLOR:BLACK.OD:6.0±0.15mm.
- 2.CONN.:P1 & P2,IEEE 1394 6P PLUG,SOLDER TYPE,BLACK PBT INSULATION,GOLD PLATED CONTACTS,GOLD PLATED SHELL.
- 3.100% ELECTRICAL TESTING.
- 4.MOLD P/N:1394-0601;1394-06N01.

CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
1394-66G-03	03	914	+50/-0
1394-66G-06	06	1829	+75/-0
1394-66G-10	10	3048	+75/-0
1394-66G-15	15	4572	+75/-0

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	03/18/08			
TITLE		1394 6M TO 6M		
PART NO.		1394-66G-XX		