


PIN OUT

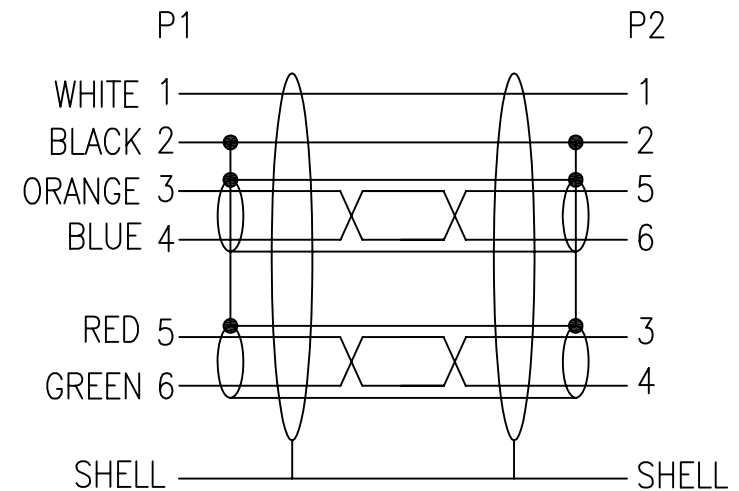

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
1394-66G-03	03	914	+50/-0
1394-66G-06	06	1829	+75/-0
1394-66G-10	10	3048	+75/-0

REMARK:

- 1.CABLE:UL20276 1394 CABLE,(28AWG*1P+AL/MYLAR+BRAID SHIELD)*2+22AWG*2C+TRANSPARENT MYLAR+AL/MYLAR+ BRAID(A-M ALLOY)SHIELDED WITH DRAIN WIRE(BARE COPPER), JACKET: BLACK PVC OD:6.0±0.15MM.
- 2.CONN.:P1 & P2,IEEE 1394 6P PLUG,SOLDER TYPE,BLACK PBT INSULATION,GOLD PLATED CONTACTS,GOLD PLATED SHELL.
- 3.OUTER MOLDED BLACK PVC.MOLD NO:1394-0601
- 4.100% ELECTRICAL TESTING

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/20/10			
TITLE		1394 6M TO 6M		
PART NO.		1394-66G-XX		