


PIN OUT

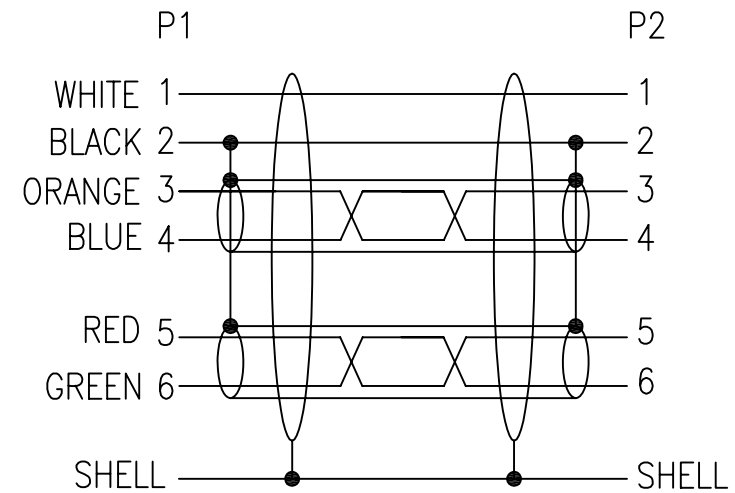

REMARK:

- 1.CABLE:UL20276 1394 CABLE,(28AWG*1P+AL/MYLAR+BRAID SHIELD)*2+22AWG*2C+TRANSPARENT MYLAR+AL/MYLAR+BRAID(A-M ALLOY)SHIELDED WITH DRAIN WIRE(BARE COPPER), JACKET: BLACK PVC OD:6.0±0.15MM..
- 2.CONN.:P1:IEEE 1394 6P PLUG,SOLDER TYPE,BLACK PBT INSULATION,GOLD PLATED CONTACTS,NICKEL PLATED SHELL
P2:IEEE 1394 6P JACK,SOLDER TYPE,BLACK PBT INSULATION, GOLD PLATED CONTACTS,NICKEL PLATED SHELL.
3. NUT:M3.0 ϕ 5.5*2.4MM NICKEL PLATED
4. MOLDED:ALL HOOD MOLDED PVC BLACK
5. TESTING:100% ELECTRICAL TESTING.

CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
1394-6M6PF-01	01	305	+15/-0
1394-6M6PF-03	03	914	+50/-0
1394-6M6PF-06	06	1829	+75/-0
1394-6M6PF-10	10	3048	+75/-0
1394-6M6PF-15	15	4572	+75/-0

NET MECHANISM Corp
www.cabling-ol.net

SCALE	NONE		REV	C
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/20/10			
TITLE		1394 6M TO 6F		
PART NO.		1394-6M6PF-XX		