


P/N	XX(FT)	L(MM)	TOLERANCE(MM)
1394-94G-03	03	914	+50/-0
1394-94G-06	06	1829	+75/-0
1394-94G-10	10	3048	+75/-0

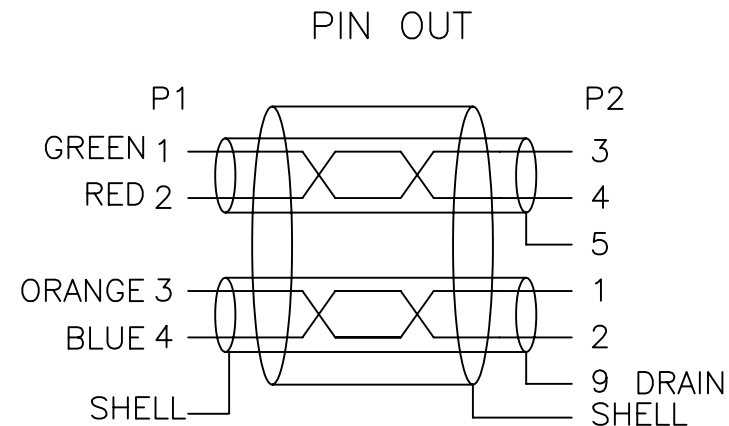

NOTE:

- CABLE: UL20379 (1P\*30#+D+AL.Mylar+Mylar)\*2C+Mylar+AL+B PVC JACKET OD:5.2±0.2mm COLOR:BLACK.
- CONNECTOR:P1: IEEE1394 4PIN MALE GOLD FLASH CONTACT GOLD PLATED SHELL.  
P2: IEEE1394B 9P/M BETA GOLD PLATED CONTACT 15U", NICKEL PLATED SHELL.
- MOLDED PVC 45P, COLOR:BLACK
- MOLD NO:P1.1394-0401; P2.1394-0901
- TESTING:100% ELECTRICAL TESTING.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	06/17/05			
TITLE	1394 9M TO 4M			
PART NO.	1394-94G-XX			