

NOTE:

1. CABLE: 28AWG X 25C, AL-FOIL SHIELDED WITH DRAIN WIRE, UL2464,BEIGE(BG-02) PVC JACKET. $\phi 7.0 \pm 0.15$ mm.
2. CONNECTOR: P1:D-SUB 25PIN MALE: SOLDER TYPE,BLACK PBT INSULATION,GOLD FLASH CONTACTS,UL RECOGNIZED.
P2:D-SUB 25PIN FEMALE:SOLDER TYPE,BLACK PBT INSULATION,GOLD FLASH CONTACTS,UL RECOGNIZE.WITH TWO M2.6 HEX NUT
3. THUMB SCREW TO BE MOLDED BEIGE (BG-02) PVC, UL94V-0.
4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
5. ALL HOOD: MOLDED BEIGE (BG-02) PVC, UL94V-0.
6. TESTING: 100% ELECTRICAL TESTING.
7. EACH ONE WITH TWO #4-40 UNC SCREW.


PIN OUT	
P1	P2
1	1
2	2
3	3
4	4
5	5
...	...
22	22
23	23
24	24
25	25
SHELL	SHELL (DRAIN)

MERCHANDISE MOQ	EACH 50PCS
LEAD TIME	15 DAY
CABLE MOQ	
CONNECTOR MOQ	

NET MECHANISM Corp			
www.cabling-ol.net			
SCALE	NONE		REV B
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	05/03/10		
TITLE			
DB25M TO DB25F			
PART NO. 3232-25M25F-XXNM			

CHART

P/N	**	XX(FT)	L(MM)	TOLERANCE(MM)
3232-25M25F-03NM	03	3	914	+50/-0
3232-25M25F-06NM	06	6	1829	+75/-0
3232-25M25F-10NM	10	10	3048	+75/-0
3232-25M25F-15NM	15	15	4572	+75/-0
3232-25M25F-25NM	25	25	7620	+150/-0
3232-25M25F-33NM	33	33	10058	+150/-0
3232-25M25F-50NM	50	50	15240	+300/-0

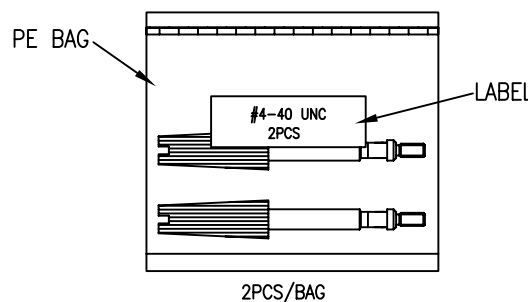

B	ADD 2PCS #4-40 SCREW	05/03/10
A	INITIAL RELEASE	11/01/05
REV	DESCRIPTION OF CHANGE	DATE