

NOTE:


1. CABLE: 28AWG X 25C, AL-FOIL SHIELDED WITH DRAIN WIRE, UL2464,BEIGE(BG-02) PVC JACKET. $\phi 7.0 \pm 0.15$ mm.
2. CONNECTOR: P1 & P2:D-SUB 25PIN MALE: SOLDER TYPE,BLACK PBT INSULATION,GOLD FLASH CONTACTS.
3. THUMB SCREW TO BE MOLDED BEIGE (BG-02) PVC, UL94V-0.
4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
5. ALL HOOD: MOLDED BEIGE (BG-02) PVC, UL94V-0.
6. TESTING: 100% ELECTRICAL TESTING.
7. EACH ONE WITH FOUR #4-40 UNC SCREW.

PIN OUT

P1	P2
1	1
2	2
3	3
4	4
5	5
...	...
22	22
23	23
24	24
25	25
SHELL	SHELL (DRAIN)

CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
3232-25M25M-03	3	914	+50/-0
3232-25M25M-06	6	1829	+75/-0
3232-25M25M-10	10	3048	+75/-0
3232-25M25M-15	15	4572	+75/-0
3232-25M25M-25	25	7620	+150/-0
3232-25M25M-33	33	10058	+150/-0
3232-25M25M-50	50	15240	+300/-0

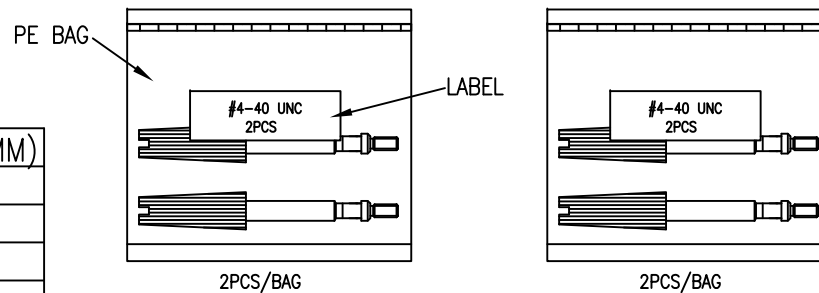

C	Cancel plug UL Mark	03/06/15
B	ADD 4PCS #4-40 SCREW	05/03/10
A	INITIAL RELEASE	11/01/05
REV	DESCRIPTION OF CHANGE	DATE

MERCHANDISE MOQ	EACH 50PCS	
LEAD TIME	15 DAY	
CABLE MOQ		
CONNECTOR MOQ		
NET MECHANISM Corp www.cabling-ol.net		
SCALE	NONE	⊕ REV C
UNIT	MM	
SHEET	1/1	DWG NO.
DATE	03/06/15	
TITLE		DB25M TO DB25M
PART NO.		3232-25M25M-XX