

NOTE:

- CABLE: 28AWG X 9C, AL-FOIL SHIELDED WITH DRAIN WIRE, UL2464,BEIGE (BG-02) PVC JACKET  $\phi 5.0 \pm 0.15$ mm.
- CONNECTOR: P1:D-SUB 9PIN FEMALE:SOLDER TYPE,GOLD FLASH CONTACTS. UL RECOGNIZED.  
P2:D-SUB 25PIN MALE:SOLDER TYPE,GOLD FLASH CONTACTS. UL RECOGNIZED.
- THUMB SCREW TO BE MOLDED BEIGE(BG-02)PVC, UL94V-0.
- SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
- ALL HOOD: MOLDED BEIGE(BG-02) PVC.UL94V-0.
- TESTING:100% ELECTRICAL TESTING.
- EACH ONE WITH TWO #4-40 UNC SCREW.


PIN OUT

P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22

(DRAIN WIRE)SHELL ——— SHELL

CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
4232-25M09F-03	03	914	+50/-0
4232-25M09F-06	06	1829	+75/-0
4232-25M09F-10	10	3048	+75/-0
4232-25M09F-15	15	4572	+75/-0
4232-25M09F-25	25	7620	+150/-0
4232-25M09F-33	33	10058	+150/-0
4232-25M09F-50	50	15240	+300/-0

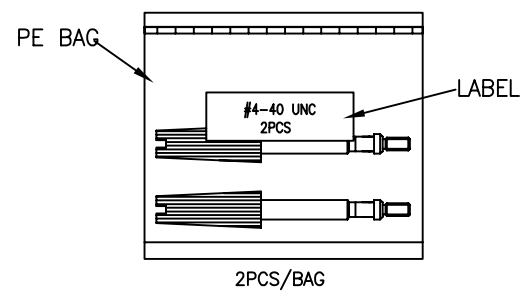

B	ADD 2PCS #4-40 SCREW	05/03/10
A	INITIAL RELEASE	11/01/05
REV	DESCRIPTION OF CHANGE	DATE

MERCHANDISE MOQ	EACH 50PCS		
LEAD TIME	15 DAY		
CABLE MOQ			
CONNECTOR MOQ			
NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE		REV B
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	05/03/10		
TITLE	DB25M TO DB9F		
PART NO.	4232-25M09F-XX		