



P/N	X(M)	L(MM)	TOLERANCE(MM)
488A-07	7	7000	+150/-0
488A-10	10	10000	+150/-0
488A-15	15	15000	+300/-0

NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE		REV
UNIT	MM		A
SHEET	1/2	DWG NO.	
DATE	09/16/05		
TITLE CN24 M/F TO CN24 M/F			
PART NO.		488A-XX	

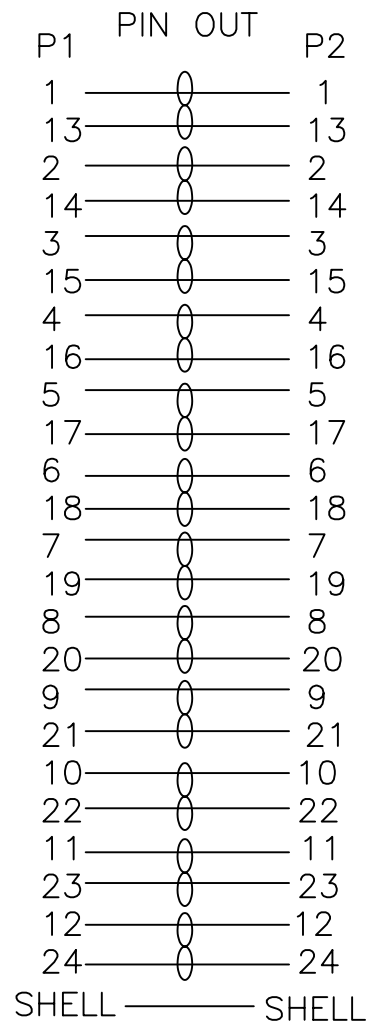

NOTE:

- 1.CABLE:UL 2464 (IEEE 488 B TYPE),26AWG*12PAIRS+AL-FOIL+DRAIN+BRAID(90%),JACKET:PVC HOOT TYPE, COLOR:GRAY(GY-08),OD=10.5±0.2MM.
- 2.CONNECTOR: P1 AND P2:CENTRONICS 24PIN M/F ADAPTER, SOLDER TYPE,GOLD FLASH CONTACTS,BLACK PBT INSULATION. ASSEMBLY TYPE: NICKEL PLATED,ASSEMBLY TYPE.
- 3.METAL THUMB SCREW.
- 4."E"TYPE MATAL "SCREW CLIP"(NICKEL PLATED).
- 5.TESTING:100% ELECTRICAL TEST.
- 6.PACKING:EACH CABLE IN A ZIP-LOCK POLY-BAG.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	2/2	DWG NO.		
DATE	09/16/05			
TITLE CN24 M/F TO CN24 M/F				
PART NO.		488A-XX		