

NOTE:

1. CABLE: 28AWG X 8C, AL-FOIL SHIELDED WITH DRAIN WIRE, UL2464,BEIGE(BG-02) PVC JACKET $\phi 5.0\pm 0.15$ mm.
2. CONNECTOR: P1:D-SUB 9PIN FEMALE:SOLDER TYPE,GOLD FLASH CONTACTS.UL RECOGNIZED. P2:D-SUB 25PIN MALE:SOLDER TYPE,GOLD FLASH CONTACTS.UL RECOGNIZED.
3. THUMB SCREW TO BE MOLDED BEIGE(BG-02)PVC, UL94V-0.
4. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
5. ALL HOOD: MOLDED BEIGE(BG-02) PVC.UL94V-0.
6. TESTING:100% ELECTRICAL TESTING.
7. EACH ONE WITH TWO #4-40 UNC SCREW.





CHART:

P/N	xx(FT)	L(MM)	TOLERANCE(MM)
9232-25M09F-03	03	914	+50/-0
9232-25M09F-06	06	1829	+75/-0
9232-25M09F-10	10	3048	+75/-0
9232-25M09F-15	15	4572	+75/-0
9232-25M09F-25	25	7620	+150/-0
9232-25M09F-33	33	10058	+150/-0
9232-25M09F-50	50	15240	+300/-0

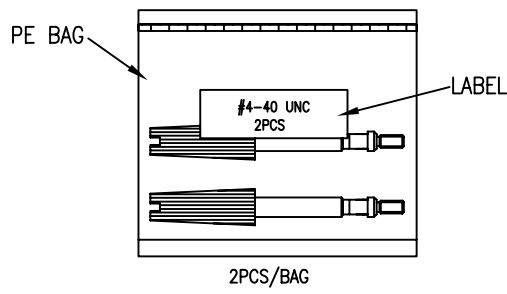

B	ADD 2PCS #4-40 SCREW	05/03/10
A	INITIAL RELEASE	11/01/05
REV	DESCRIPTION OF CHANGE	DATE

MERCHANDISE MOQ	EACH 50PCS
LEAD TIME	15 DAY
CABLE MOQ	
CONNECTOR MOQ	
NET MECHANISM Corp www.cabling-ol.net	
SCALE	NONE
UNIT	MM
SHEET	1/1
DATE	05/03/10
TITLE	DB25M TO DB9F
PART NO.	9232-25M09F-XX

