
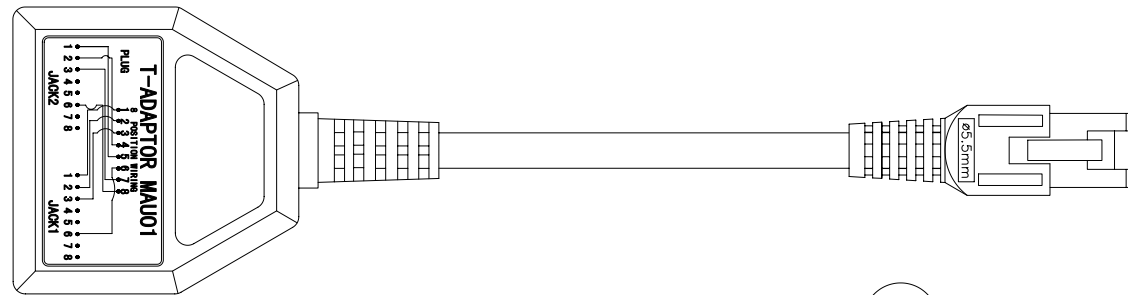


**BOTTOM VIEW**

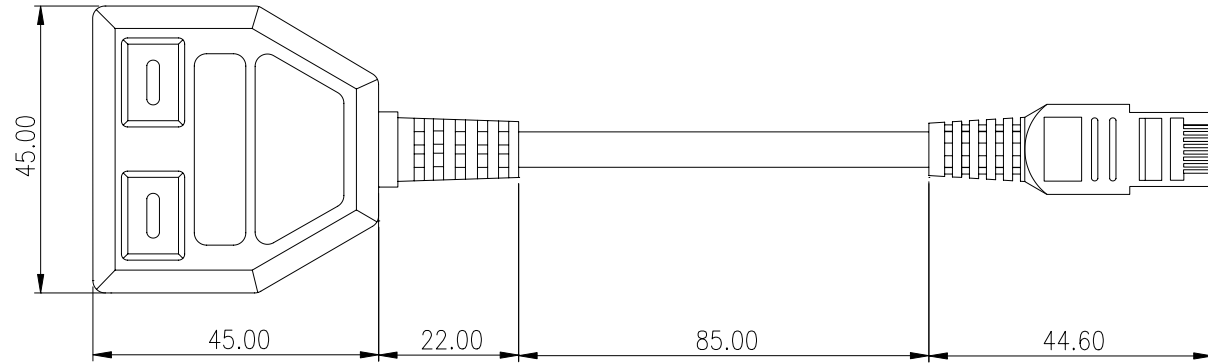

C  US LISTED


**ENCLOSURE: 100N PO (BLUE) X 2**  
**100N PO (GREEN) X 2**

**MATERIAL**

Housing:ABS,UL94V-0  
Spring Wire:Phosper Bronze with 50u  
"Gold over 100u"Nickel undercoat  
Temperature:-40C~68C  
Humidity:10%~90%RH  
Modular jack:750 mating cycles

**ELECTRICAL:**

Current rating:1.5Amps  
Insulation resistance:500M0hm  
Contact resistance:20M0hm  
DC resistanc:0.10hm  
Dielectric withstanding voltage:1000v

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/13/04			
TITLE				
C-001-1				
PART NO.				
AC5-T				