


Cat6	Cross-Over Wiring
1-3	5-8
2-6	6-2
3-1	7-4
4-7	8-5

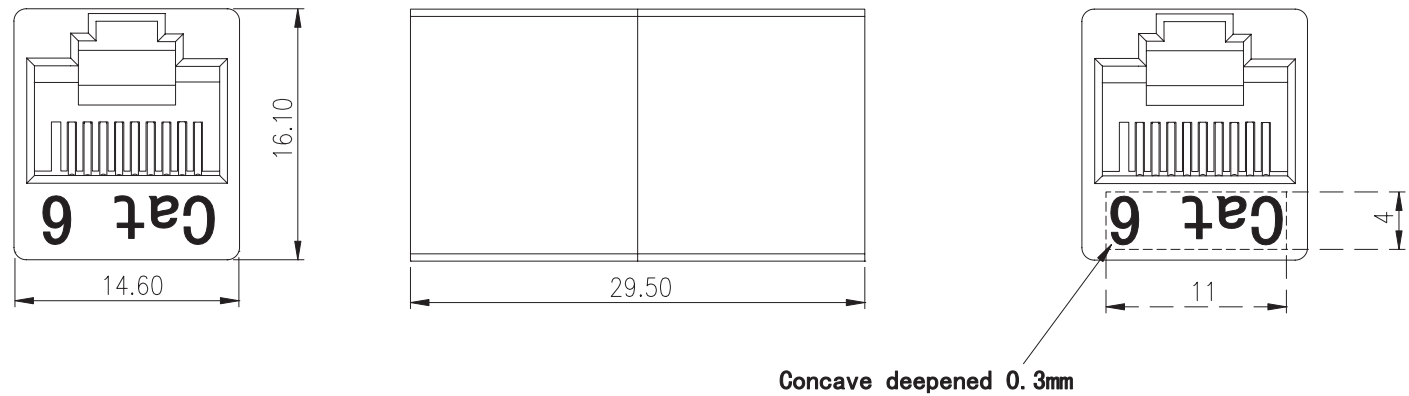

MATERIAL
Housing:ABS,UL94V-0
Spring Wire:Phospher Bronze with 50u
"Gold over 100u"Nickel undercoat
Temperature:-40C~68C
Humidity:10%~90%RH
Modular jack:750 mating cycles

ELECTRICAL:
Current rating:1.5Amps
Insulation resistance:500M0hm
Contact resistance:20M0hm
DC resistanc:0.10hm
Dielectric withstanding voltage:1000v

ROHS COMPLIANT

NET MECHANISM Corp					
www.cabling-ol.net					
SCALE	NONE		REV	A	
UNIT	MM				
SHEET	1/1	DWG NO.			
DATE	12/04/06				
TITLE		2100F-8T-C6-XX-R			
PART NO.		AC6R-CR			