

NOTE:

- ▲ [1C\*28AWG(7/0.127)+SPIRAL+PVC]\*2COAX+PVC JACK  
COLOR BLACK MATT OD=7.5±0.15MM(IMPEDANCE:75 OHM)
- ▲ [1C\*26AWG(7/0.16)+AL/MY+SPIRAL+PVC]\*1+PVC JACK  
COLOR BLACK MATT OD=6.0±0.15MM(IMPEDANCE:75 OHM)
- 3. CONNECTOR:P1:ø3.5 STEREO MALE PLUG,GOLD PLATED,INSULATION BLACK.  
P2&P3:RCA PLUG,SHELL GOLD PLATED 3u”, INSULATION WHITE.
- 4. HOOD:MOLDED 45PVC BLACK.
- ▲ COLOR RING:90P PVC.
- 6. MOLD NO.:P1:DC35-02,DC35-N02,P2:RCA-CV,RCA-02,RCA-N02.
- 7. TESTING:100% ELECTRICAL TESTING.

PIN OUT:

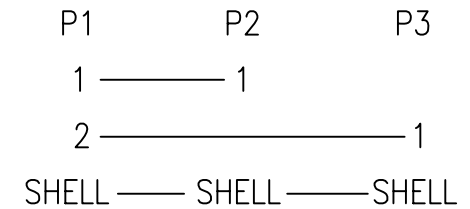



CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
AD-SM2RM-03	3	914	+50/-0
AD-SM2RM-06	6	1829	+75/-0
AD-SM2RM-12	12	3657	+75/-0
AD-SM2RM-17	17	5182	+150/-0
AD-SM2RM-25	25	7620	+150/-0
AD-SM2RM-33	33	10058	+150/-0
AD-SM2RM-50	50	15240	+300/-0

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	2/18/08			
TITLE		ST3.5/M TO 2 RCA/M		
PART NO.		AD-SM2RM-XX		