


WIRE DIAGRAM

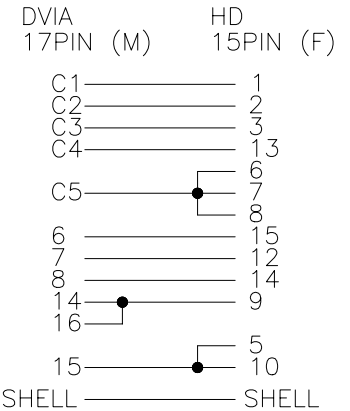

- 1. DVIA17M: DVI-Analog 17P Male Connector  
Insulator: High Temperature Plastic UL-94V-0 Contact: Bronze  
Shell: Steel With Tin Plated 150u" Over  
Contact Plating: Gold On Contact Area  
And Tin/LEAD On Solder Cup All With Nickel Underplating
- 2. Jack Screw: UNC #4-40 Nickel Plated
- 3. Hood: P.V.C Molded Color: black  
Inner Molded With Copper Foil Shielded
- 4. Screw Lock: UNC #4-40 Nickel Plated
- 5. HD15F: D-SUB High Density 2.29mm 15P Female Connector Shell: Steel Nickel Plated  
Insulator: Black P.B.T Contact: Brass G/F Gold Plated
- 6. TESTING: 100% ELECTRICAL TEST.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	06/21/05	TITLE		
		DVI 12+5M TO HDD 15F		
PART NO.	ADP-DVI-IMAF			