

NOTE:

1. [1C*26AWG(7/0.16)+AL/MY+SPIRAL+PVC JACKET BLACK]*2F +{[1C*28AWG(7/0.127)+SP+PVC JACK]*2C+F+AB+PVC JACKET BLACK(BK)}*1F COLOR BLACK MATT OD=6.0*6.0*7.5±0.15MM (IMPEDANCE:75 OHM).
2. CONNECTOR:
 P1 & P4 MD4M,SHELL GOLD PLATED, NSULATION BLACK(PUNCH PIN).
 P2 & P3 & P5 & P6 RCA PLUG,SHELL GOLD PLATED 3u", INSULATION WHITE.
3. HOOD:MOLDED 45P PVC BLACK.
4. COLOR RING:60P PVC.
5. TESTING:100% ELECTRICAL TESTING.

PIN OUT

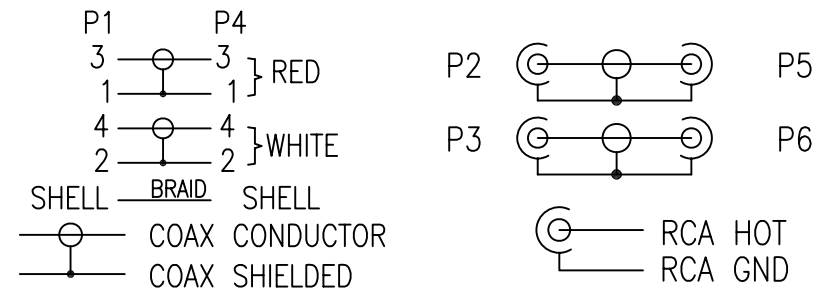


CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
AV-2RMSV-03	3	914	+50/-0
AV-2RMSV-06	6	1829	+75/-0
AV-2RMSV-12	12	3658	+75/-0
AV-2RMSV-17	17	5182	+150/-0
AV-2RMSV-25	25	7620	+150/-0
AV-2RMSV-33	33	10058	+150/-0
AV-2RMSV-50	50	15240	+300/-0

NET MECHANISM Corp
 www.cabling-ol.net

SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	03/09/07			
TITLE A/V CABLE 2RCA+S-VIDEO TO B.E.				
PART NO. AV-2RMSV-XX				