




| P/N | X(M) | L(MM) | TOLERANCE(MM) |
|---------------|------|-------|---------------|
| AV-3RMMHS-M01 | 1 | 1000 | +75/-0 |
| AV-3RMMHS-M02 | 2 | 2000 | +75/-0 |
| AV-3RMMHS-M03 | 3 | 3000 | +75/-0 |
| AV-3RMMHS-M05 | 5 | 5000 | +150/-0 |
| AV-3RMMHS-M10 | 10 | 10000 | +150/-0 |
| AV-3RMMHS-M15 | 15 | 15000 | +300/-0 |

PIN OUT

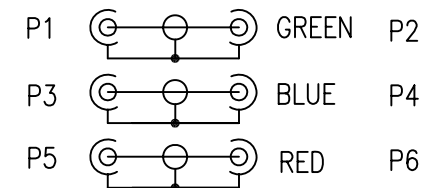

NOTE:

1. CABLE: UL2919 28AWG (7/0.127)*3COAX(OFC)+PAPER+JACKET.
JACKET COLOR:BLACK MATT PVC AND OD=φ7.0±0.15MM.
2. CONNECTOR: P1,P2,P3,P4,P5,P6:RCA MALE,INSULATION:WHITE,
SHELL:GOLD PLATED.
3. MOLDING 60P PVC.P1&P2:RED;P3&P4:WHITE;P5&P6:YELLOW.
4. STRAIN RELIEF MOLDING 45P BLACK PVC.
5. PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
6. MOLD NO.: RCA-01; SR-11.

NET MECHANISM Corp
www.cabling-ol.net

| | | | | |
|----------|------------------|---------|-----|---|
| SCALE | NONE | | REV | B |
| UNIT | MM | | | |
| SHEET | 1/1 | DWG NO. | | |
| DATE | 08/20/06 | | | |
| TITLE | RCAM*3 TO RCAM*3 | | | |
| PART NO. | AV-3RMMHS-MXX | | | |