




P/N	X(M)	L(MM)	TOLERANCE(MM)
AV-3RMMHS-M01	1	1000	+75/-0
AV-3RMMHS-M02	2	2000	+75/-0
AV-3RMMHS-M03	3	3000	+75/-0
AV-3RMMHS-M05	5	5000	+150/-0
AV-3RMMHS-M10	10	10000	+150/-0
AV-3RMMHS-M15	15	15000	+300/-0

PIN OUT

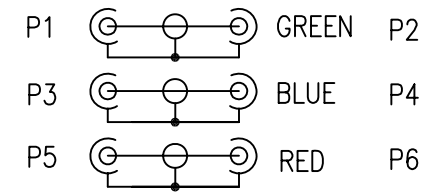

NOTE:

1. CABLE: UL2919 28AWG (7/0.127)\*3COAX(OFC)+PAPER+JACKET.  
JACKET COLOR:BLACK MATT PVC AND OD=φ7.0±0.15MM.
2. CONNECTOR: P1,P2,P3,P4,P5,P6:RCA MALE,INSULATION:WHITE,  
SHELL:GOLD PLATED.
3. MOLDING 60P PVC.P1&P2:RED;P3&P4:WHITE;P5&P6:YELLOW.
4. STRAIN RELIEF MOLDING 45P BLACK PVC.
5. PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
6. MOLD NO.: RCA-01; SR-11.

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	08/20/06			
TITLE	RCAM*3 TO RCAM*3			
PART NO.	AV-3RMMHS-MXX			