
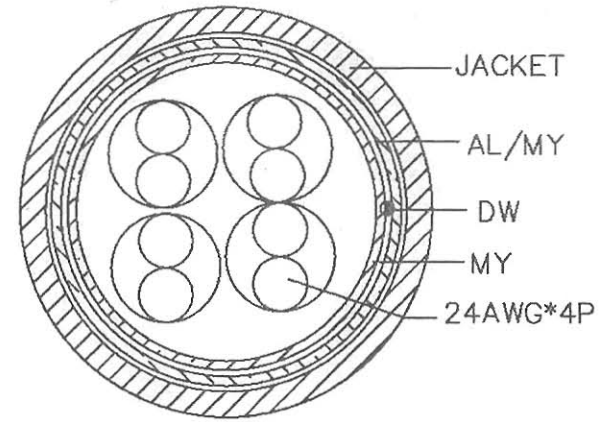


SPECIFICATION: 4P*24AWG+MYLAR+DRAIN+AL.MYLAR			CONSTRUCTION D.W.G			
ITEM		SPECIFICATION	<p>PVC JACKET AL.MYLAR MYLAR CONDUCTOR INSULATION DRAIN</p>			
CONDUCTOR	AWG	24AWG				
	MATERIAL	BARE COPPER				
	COND.SIZE	7/0.203±0.008 mm				
INSULATION	MIN.AVG.THICK	0.15 mm				
	MATERIAL	HD-PE				
	Ø .D	0.99±0.05 mm				
MYLAR	N O.	4P				
	COVERAGE	100%				
	OVERLAP	25% MIN				
DRAIN	AWG	24AWG				
	MATERIAL	TINNED COPPER				
	SIZE	7/0.20±0.008 mm×1PC				
Face Inside AL.MYLAR	COVERAGE	100%			COLOUR CODE: 1.BLUE *WHITE/BLUE 2.ORANGE*WHITE/ORANGE 3. GREEN*WHITE/GREEN 4. BROWN*WHITE/BROWN	
	OVERLAP	25% MIN				
JACKET	MIN.AVG.THICK	0.50 mm				
	MATERIAL	HALF MATT PVC				
	COLOUR	UL10464 LOW TOXIC				
	Ø .D	6.00 ± 0.15 mm				
ELECTRICAL CHARACTERISTICS 1. Rating : TEMP 60°C 2. Conductor Resistance: AT 20°C MAX 24AWG: 93.25Ω/km;			MARKING			
			E188601 (UL) TYPE CM LL84201 CSA TYPE CMG FT4 CAT5E PATCH CABLE TO TIA/EIA 568A 4STP 24AWG STRANDED			
			REMARK			
		PART NO.				
APPROVED		CUSTOMER				
CHECKED		REV	A			
DRAWING	LXY	DATE	2004/5/28			

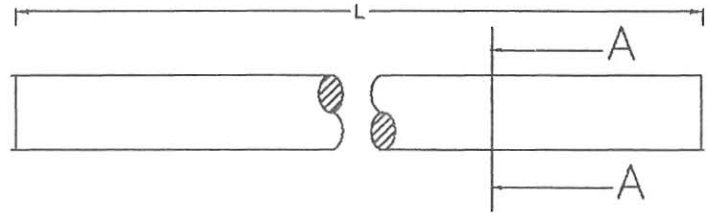

SECTION A-A

NOTES:

電線 [24AWG(7/0.20)*4P(BARE)+MY+DW(7/0.20)(TIN)+AL/MY]

芯線 HD-PE, OD=φ0.98±0.05MM

顏色 藍&白/藍 橙&白/橙 綠&白/綠 棕&白/棕

外被 80°C PVC, OD=φ5.9±0.2MM (套式)

顏色 3B50MCTG02945C (藍色, 依客樣, 亮面)

噴字: E126126-DG (UL) CM 75℃ C(UL) 24AWG 4PAIR F/UTP

CAT5.E 4PAIRS 24AWG STRANDED RoHS (噴黑字)

承办: 李华强

核准: [Signature]

NO.	DESCRIPTION	Q'TY	MATERIAL	TOOLING NO.
PAN-INTERNATIONAL INDUSTRIAL CORP. DONG GUAN, CHINA				
圖名 NAME				
圖號 DWG NO.				
單位 UNITS	M.M	一般公差		繪圖 DRAW BY
比例 SCALE	NONE	.X .XX .XXX		XU
校對 CHECKED	ANGLES:		核准 APPLY	

A	發文生產	10/29/2013	XU	
REV	DESCRIPTION	DATE	NAME	ECN NO.
				SHEET

WI07-E02=F062=01

PRODUCT SPECIFICATION: CAT.5E F/UTP																																	
Cross Section	Color																																
	<p>Insulation</p> <p>Cores: Pairs</p> <p>P1:Blue & White/Blue</p> <p>P2:Orange & White/Orange</p> <p>P3:Green & White/Green</p> <p>P4:Brown & White/Brown</p>																																
Marking	Jacket																																
<p>Jacket Marking</p> <p>SUNF PU E132276-C (UL) CM 75°C C(UL) 4PAIRS 24AWG△△△F/UTP CAT.5E ETL & 3P VERIFIED TO ANSI/TIA-568-C.2 STRANDED RoHS NOTE: "△" for a blank</p>	<table border="1"> <thead> <tr> <th>Marking</th> <th>Color & sunfpu code</th> </tr> </thead> <tbody> <tr> <td>Black</td> <td>Non-brightness Yellow</td> </tr> <tr> <td>Black</td> <td>Non-brightness White</td> </tr> <tr> <td>Black</td> <td>Non-brightness Purple</td> </tr> <tr> <td>Black</td> <td>Non-brightness Blue</td> </tr> <tr> <td>White</td> <td>Non-brightness Black</td> </tr> <tr> <td>Black</td> <td>Non-brightness Green</td> </tr> <tr> <td>Black</td> <td>Non-brightness Red</td> </tr> </tbody> </table>	Marking	Color & sunfpu code	Black	Non-brightness Yellow	Black	Non-brightness White	Black	Non-brightness Purple	Black	Non-brightness Blue	White	Non-brightness Black	Black	Non-brightness Green	Black	Non-brightness Red																
Marking	Color & sunfpu code																																
Black	Non-brightness Yellow																																
Black	Non-brightness White																																
Black	Non-brightness Purple																																
Black	Non-brightness Blue																																
White	Non-brightness Black																																
Black	Non-brightness Green																																
Black	Non-brightness Red																																
Description																																	
<p>Rated Voltage (V) -</p> <p>Rated Temperature (°C) 75</p> <p>Product Standard Certification UL CM</p> <p>Flame test FT4</p> <p>Application</p> <p>Telephone and other communication circuits such as voice, data, and audio for on-premise customer systems.</p> <p>Reference Standard</p> <p>UL 444</p>																																	
Construction	Performance																																
<table border="1"> <thead> <tr> <th>Conductor</th> <th>Stranded Bare Copper</th> </tr> </thead> <tbody> <tr> <td>4 Twisted Pair</td> <td>8C</td> </tr> <tr> <td>AWG</td> <td>24</td> </tr> <tr> <td>Construction (±0.008mm)</td> <td>7/0.20</td> </tr> <tr> <td>Stranded Dia.(mm)</td> <td>0.61</td> </tr> <tr> <td>Insulation</td> <td>PE</td> </tr> <tr> <td>Nom. Thickness (mm)</td> <td>0.18</td> </tr> <tr> <td>Insulation Dia.(±0.05mm)</td> <td>0.97</td> </tr> <tr> <td>Shield</td> <td>Polyester Tape</td> </tr> <tr> <td>Coverage(%)</td> <td>≥125%</td> </tr> <tr> <td>Drain Wire(Stranded Tinned Copper)(±0.008mm)</td> <td>7/0.20T</td> </tr> <tr> <td>Shield</td> <td>Aluminum/Polyester</td> </tr> <tr> <td>Coverage(%)</td> <td>≥125%</td> </tr> <tr> <td>Jacket</td> <td>PVC</td> </tr> <tr> <td>Nom. Thickness(mm)</td> <td>0.59</td> </tr> <tr> <td>Outer Dia.(±0.2mm)</td> <td>5.90</td> </tr> </tbody> </table>	Conductor	Stranded Bare Copper	4 Twisted Pair	8C	AWG	24	Construction (±0.008mm)	7/0.20	Stranded Dia.(mm)	0.61	Insulation	PE	Nom. Thickness (mm)	0.18	Insulation Dia.(±0.05mm)	0.97	Shield	Polyester Tape	Coverage(%)	≥125%	Drain Wire(Stranded Tinned Copper)(±0.008mm)	7/0.20T	Shield	Aluminum/Polyester	Coverage(%)	≥125%	Jacket	PVC	Nom. Thickness(mm)	0.59	Outer Dia.(±0.2mm)	5.90	<p>Electrical Characteristics(20°C)</p> <p>Max. Conductor DC Resistance (Ω/km) #24:93</p> <p>Min. Insulation Resistance(Ω-m) PE:100M</p> <p>Dielectric Strength AC-500V/1 Min</p> <p>Pass Fluke channel Test only.</p> <p>Max. Jacket Tensile Strength(kgf/mm²) 1.05</p>
Conductor	Stranded Bare Copper																																
4 Twisted Pair	8C																																
AWG	24																																
Construction (±0.008mm)	7/0.20																																
Stranded Dia.(mm)	0.61																																
Insulation	PE																																
Nom. Thickness (mm)	0.18																																
Insulation Dia.(±0.05mm)	0.97																																
Shield	Polyester Tape																																
Coverage(%)	≥125%																																
Drain Wire(Stranded Tinned Copper)(±0.008mm)	7/0.20T																																
Shield	Aluminum/Polyester																																
Coverage(%)	≥125%																																
Jacket	PVC																																
Nom. Thickness(mm)	0.59																																
Outer Dia.(±0.2mm)	5.90																																
<p>Jacket Marking</p> <p>SUNF PU E132276-C (UL) CM 75°C C(UL) 4PAIRS 24AWG△△△F/UTP CAT.5E ETL & 3P VERIFIED TO ANSI/TIA-568-C.2 STRANDED RoHS NOTE: "△" for a blank</p>	<p>TNT P/N:06F-R4P-T24-SH-XX</p> <p>NOTE: "XX" stands for Jacket Color</p>																																
<p>Revision History :</p> <p>Add jacket color 18.8.24</p>	<table border="1"> <tbody> <tr> <td>Sample No.</td> <td></td> <td>Spec No.</td> <td>A05587-A</td> </tr> <tr> <td>Customer</td> <td>SAN WANG</td> <td>Rev.</td> <td>A</td> </tr> <tr> <td>Date</td> <td>2018/8/24</td> <td>Page</td> <td>1 of 1</td> </tr> <tr> <td>Designed By</td> <td>Checked By</td> <td colspan="2">Approved By</td> </tr> <tr> <td colspan="2">Fang</td> <td colspan="2">[Signature]</td> </tr> </tbody> </table>	Sample No.		Spec No.	A05587-A	Customer	SAN WANG	Rev.	A	Date	2018/8/24	Page	1 of 1	Designed By	Checked By	Approved By		Fang		[Signature]													
Sample No.		Spec No.	A05587-A																														
Customer	SAN WANG	Rev.	A																														
Date	2018/8/24	Page	1 of 1																														
Designed By	Checked By	Approved By																															
Fang		[Signature]																															