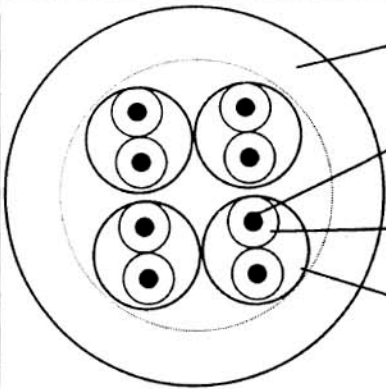


SPECIFICATION:		4P*28AWG		CONSTRUCTION D.W.G			
ITEM		SPECIFICATION		 <p>PVC JACKET</p> <p>CONDUCTOR</p> <p>INSULATION</p> <p>PAIR</p>			
CONDUCTOR	AWG	28AWG					
	MATERIAL	BARE COPPER					
	COND.SIZE	7/0.12±0.008 mm					
INSULATION	MIN.AVG.THICK	0.10 mm					
	MATERIAL	HD-PE					
	O . D	0.60±0.05 mm					
JACKET	N O.	4P					
	MIN.AVG.THICK	0.38 mm					
	MATERIAL	MATT PVC					
	COLOUR	UL30029 LOW TOXIC					
	O . D	3.50 ± 0.15 mm					
				COLOUR CODE:			
				1.BLUE * WHITE/BLUE		2.ORANGE* WHITE /ORANGE	
				3. GREEN* WHITE/GREEN		4. BROWN* WHITE/BROWN	
				MARKING			
				E119932 RJ AWM STYLE 2835 60°C 30V VW-1 28AWG 4PR UTP PATCH CORD CAT.5E			
				REMARK			
ELECTRICAL CHARACTERISTICS		PHYSICAL PROPERTIES					
1. Rating : TEMP 60 °C ; VOLT AGE 30 V							
2. Conductor Resistance: at 20°C MAX							
28 AWG: 237.25Ω/km;							
				PART NO.			
APPROVED				CUSTOMER			
CHECKED				REV			
DRAWING				DATE			
				A			
				2005/8/19			