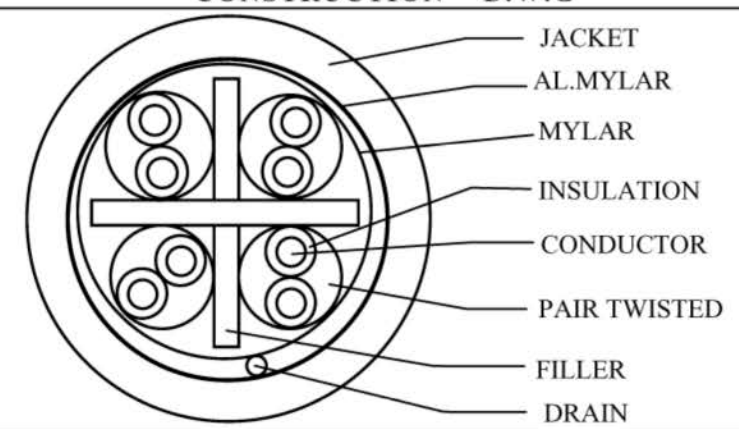



SPECIFICATION:		4P*26AWG+MYLAR+DRAIN+AL.MYLAR		CONSTRUCTION D.W.G			
<b>ITEM</b>		<b>SPECIFICATION</b>					
CONDUCTOR	AWG	26AWG					
	MATERIAL	BARE COPPER					
	COND.SIZE	7/0.16±0.008 mm					
INSULATION	MIN.AVG.THICK	0.15 mm					
	MATERIAL	HD-PE					
	O . D	0.87±0.05 mm					
	N O.	4P					
MYLAR	COVERAGE	100%					
	OVERLAP	25% MIN					
DRAIN	AWG	26AWG					
	MATERIAL	TINNED COPPER					
	SIZE	7/0.16±0.008 mm×1PC					
Face Inside AL.MYLAR	COVERAGE	100%				<b>COLOUR CODE:</b> 1.BLUE *WHITE/BLUE      2.ORANGE*WHITE/ORANGE 3. GREEN*WHITE/GREEN    4. BROWN*WHITE/BROWN	
	OVERLAP	25% MIN					
JACKET	MIN.AVG.THICK	0.50 mm					
	MATERIAL	LIGHT PVC					
	COLOUR	UL16004 RED LOW TOXIC					
	O . D	6.00 ± 0.15 mm					
<b>ELECTRICAL CHARACTERISTICS</b>							
1. Rating : TEMP 60°C 2. Conductor Resistance: AT 20°C MAX 26AWG: 148.94Ω/km;							
<b>MARKING</b>							
E188601 (UL) TYPE CM 26AWG/4PRS LL84201 CSA TYPE CMG FT4 FTP CAT6 CABLE COPARTNER RoHS							
<b>REMARK</b>							
		<b>PART NO.</b>					
<b>APPROVED</b>		<b>CUSTOMER</b>					
<b>CHECKED</b>		<b>REV</b>		C/1			
<b>DRAWING</b>	BAO.XU	<b>DATE</b>		2007/1/8			