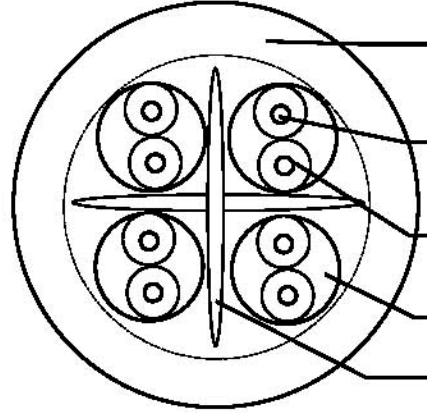


SPECIFICATION:		4P*24AWG		CONSTRUCTION D.W.G	
ITEM		SPECIFICATION			
CONDUCTOR	AWG	24AWG			
	MATERIAL	BARE COPPER			
	COND.SIZE	7/0.203±0.008 mm			
INSULATION	MIN.AVG.THICK	0.15 mm			
	MATERIAL	HD-PE			
	O .D	0.97 ± 0.05 mm			
JACKET	N O.	4P			
	MIN.AVG.THICK	0.50 mm			
	MATERIAL	HALF MATT PVC(TUBE)			
	COLOUR	UL30029 BLUE			
	O .D	6.20 ± 0.15 mm			
				1.BLUE * WHITE/BLUE 2.ORANGE* WHITE /ORANGE	
				3. GREEN* WHITE/GREEN 4. BROWN* WHITE/BROWN	
ELECTRICAL CHARACTERISTICS				MARKING	
1. Rating : TEMP 75°C				. PATCH CABLE CAT6 GIGASYSTEM	
2. Conductor Resistance: AT 20°C MAX 24AWG: 93.25Ω/km;				E188601 (UL) CM 75°C UTP 4PR 24AWG LL84201	
				CSA CMG ETL VERIFIED TO TIA/EIA 568-B.2-1 CAT 6	
				REMARK	
				PART NO.	
APPROVED				CUSTOMER	
CHECKED				REV A	
DRAWING		LXY		DATE 2004/4/29	