




P/N	XX(FT)	L(MM)	TOLERANCE(MM)
BDIS-BNC33-06	6	1829	+75/-0
BDIS-BNC33-10	10	3048	+75/-0
BDIS-BNC33-25	25	7620	+150/-0

PIN OUT

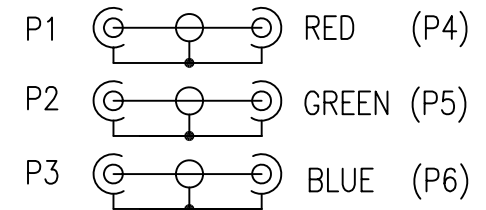

NOTE:

1. CABLE: (28AWG X 5 COAX, EACH COAX SPIRAL SHIELDED, UL1354, COLOR CODE: RED, GREEN, BLUE, GREY, BLACK), AL-FOIL AND BRAID(85%) SHIELDED(A-M ALLOY) WITH DRAIN WIRE(BARE COPPER), UL2919 + CUL IA FT1, BLACK PVC JACKET. $\phi 9.0 \pm 0.15\text{mm}$
2. CONNECTOR: P1~P6: BNC MALE: GOLD FLASH CONTACTS, 75 OHM.
3. ALL HOOD MOLDED BLACK PVC.
4. PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/21/10			
TITLE				
3BNCM TO 3BNCM				
PART NO.				
BDIS-BNC33-XX				