



P/N	XX(FT)	L(MM)	TOLERANCE(MM)
BDIS-BNC44-06	6	1829	+75/-0
BDIS-BNC44-10	10	3048	+75/-0
BDIS-BNC44-25	25	7620	+150/-0

NOTE:

1. CABLE: (28AWG X 5 COAX, EACH COAX SPIRAL SHIELDED, UL1354, COLOR CODE: RED, GREEN, BLUE, GREY, BLACK), AL-FOIL AND BRAID(85%) SHIELDED(A-M ALLOY) WITH DRAIN WIRE(BARE COPPER), UL2919 + CUL IA FT1, BLACK PVC JACKET.  $\phi 9.0 \pm 0.15\text{mm}$
2. CONNECTOR: P1~P8: BNC MALE, GOLD FLASH CONTACTS, 75 OHM.
3. ALL HOOD & STRAIN RELIEF : MOLDED BLACK PVC.
4. PACKING: EACH CABLE IN A BLANK POLY-BAG.
5. TEST:100% ELECTRICAL TESTING.



PIN OUT

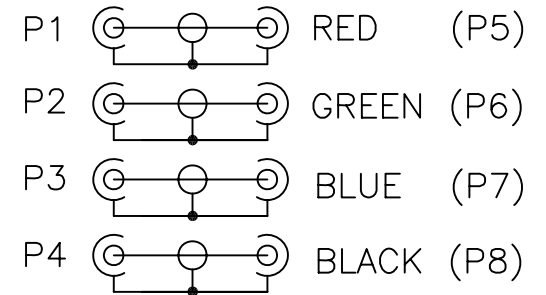

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	03/26/05			
TITLE				
4BNCM TO 4BNCM				
PART NO.				
BDIS-BNC44-XX				