


P1

P/N	X(M)	L(MM)	TOLERANCE(MM)
BNCP-59BU0050	0.5	500	+25/-0
BNCP-59BU0100	1	1000	+25/-0
BNCP-59BU0150	1.5	1500	+50/-0
BNCP-59BU0200	2	2000	+50/-0
BNCP-59BU0300	3	3000	+50/-0
BNCP-59BU0500	5	5000	+50/-0
BNCP-59BU1000	10	10000	+150/-0
BNCP-59BU1500	15	15000	+300/-0
BNCP-59BU2000	20	20000	+300/-0

PIN OUT :

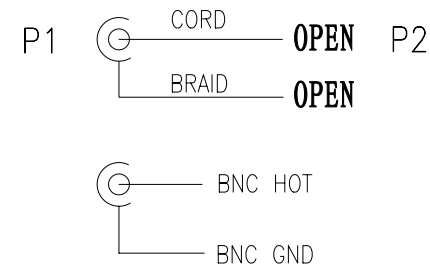

NOTE:

- 1.CABLE:RG59B/U CONDUCTOR:1/0.58 BARE COPPER)+PE INSULATION+ BRAID(16\*7/0.12),PVC JACKET,COLOR:BLACK,ø6.0±0.15mm.
- 2.CONN.:P1: BNC MALE, GOLD FLASH CONTACTS, 75 OHM.(RG59)
- 3.MOLD 45P PVC BLACK.
- 4.TESTING:100% ELECTRICAL TEST.
- 5.PACKING:EACH CABLE IN A POLY-BAG.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	06/21/05			
TITLE		BNC/M TO OPEN 75ohm		
PART NO.		BNCP-59BUXXX		