


P/N	X(M)	L(MM)	TOLERANCE(MM)
BNCPP-58AU0050	0.5	500	+25/-0
BNCPP-58AU0100	1	1000	+25/-0
BNCPP-58AU0150	1.5	1500	+50/-0
BNCPP-58AU0200	2	2000	+50/-0
BNCPP-58AU0300	3	3000	+50/-0
BNCPP-58AU0500	5	5000	+50/-0
BNCPP-58AU1000	10	10000	+150/-0
BNCPP-58AU1500	15	15000	+300/-0
BNCPP-58AU2000	20	20000	+300/-0

PIN OUT :

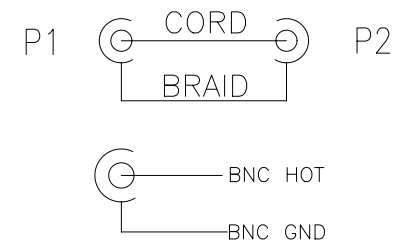

NOTE:

- 1.CABLE:RG58A/U 20AWGx1C(19/0.18 TINNED COPPER)+PE INSULATION+ BRAID(16*6/0.12),PVC JACKET,COLOR:BLACK(BK), $\phi 5.0 \pm 0.15$ mm..
- 2.CONN.:P1,P2: BNC MALE, GOLD FLASH CONTACTS, 50 OHM.(RG58U)
- 3.MOLD 45P PVC BLACK(BK).
- 4.TESTING:100% ELECTRICAL TEST.
- 5.PACKING:EACH CABLE IN A POLY-BAG.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	06/17/05			
TITLE		BNC/M TO BNC/M		
PART NO.		BNCPP-58AUXXXX		