


| P/N | X(M) | L(MM) | TOLERANCE(MM) |
|------------|------|-------|---------------|
| C14P-M0050 | 0.5 | 500 | +25/-0 |
| C14P-M0100 | 1 | 1000 | +25/-0 |
| C14P-M0150 | 1.5 | 1500 | +50/-0 |
| C14P-M0200 | 2 | 2000 | +50/-0 |
| C14P-M0300 | 3 | 3000 | +50/-0 |
| C14P-M0500 | 5 | 5000 | +50/-0 |

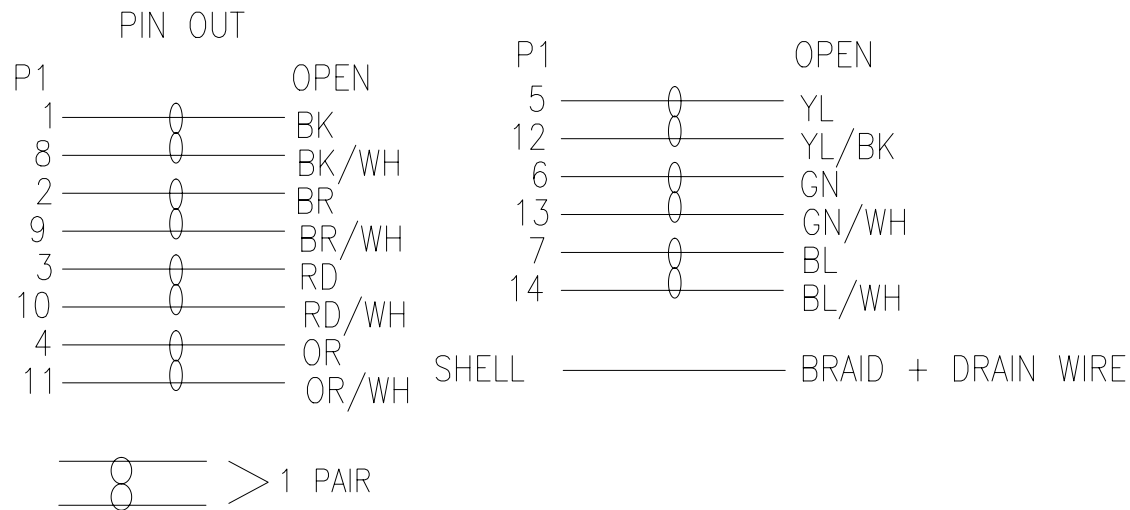

NOTE:

1. CABLE: UL2464 28AWG*7P+AEB. PVC JACKET BGIGE(BG-02), OD:7.0±0.15MM.
2. CONNECTOR: P1 : CENTRONICS 14PIN MALE: SOLDER ASSY TRADITION TYPE, GOLD FLASH CONTACTS. BLUE PBT INSULATION,W/METAL SHELL AND THIMBLE(OD:10MM).
- 3.PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON POLYBAG.
- 4.100% ELECTRICAL TESTING.

| | | | | |
|--|----------|---------|-----|---|
| NET MECHANISM Corp www.cabling-ol.net | | | | |
| SCALE | NONE | | REV | A |
| UNIT | MM | | | |
| SHEET | 1/1 | DWG NO. | | |
| DATE | 11/13/04 | | | |
| TITLE CN14M TO OPEN | | | | |
| PART NO. C14P-MXXXX | | | | |