



P1 CN24M

P/N	X(M)	L(MM)	TOLERANCE(MM)
C24P-M0050	0.5	500	+25/-0
C24P-M0100	1	1000	+25/-0
C24P-M0150	1.5	1500	+50/-0
C24P-M0200	2	2000	+50/-0
C24P-M0300	3	3000	+50/-0
C24P-M0500	5	5000	+50/-0

PIN OUT

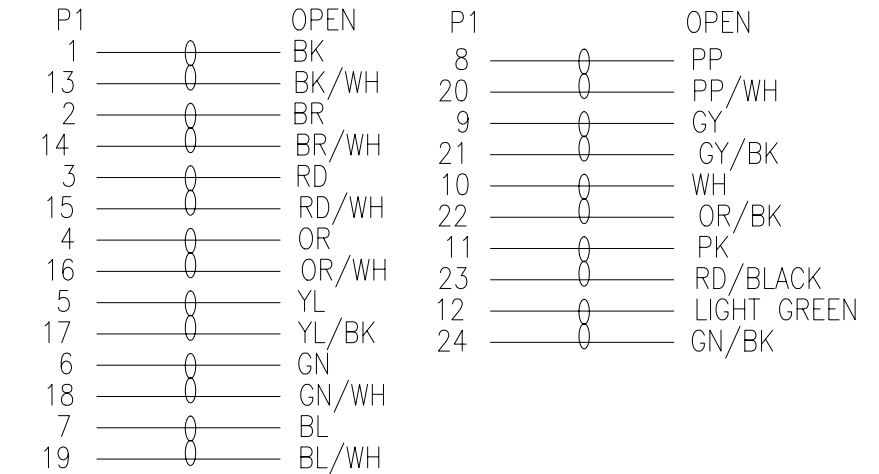

SHELL ——— BRAID + DRAIN WIRE



NOTE:

- CABLE: UL2464 28AWG\*12P+AEB. PVC JACKET BEIGE(BG-02), OD:8.5±0.15MM.
- CONNECTOR: P1:CENTRONICS 24PIN MALE:SOLDER ASSY TRADITION TYPE, GOLD FLASH CONTACTS. BLUE PBT INSULATION, W/METAL SHELL AND THIMBLE(OD:10MM).
- PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.  
LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON POLYBAG.
- 100% ELECTRICAL TESTING.

NET MECHANISM Corp				www.cabling-ol.net	
SCALE	NONE		REV	A	
UNIT	MM				
SHEET	1/1	DWG NO.			
DATE	11/13/04				
TITLE CN24M TO OPEN					
PART NO. C24P-MXXXX					