


P1 CN24M


P/N	X(M)	L(MM)	TOLERANCE(MM)
C24PP-M0050	0.5	500	+50/-0
C24PP-M0100	1	1000	+75/-0
C24PP-M0150	1.5	1500	+75/-0
C24PP-M0200	2	2000	+75/-0
C24PP-M0300	3	3000	+75/-0
C24PP-M0500	5	5000	+150/-0

PIN OUT

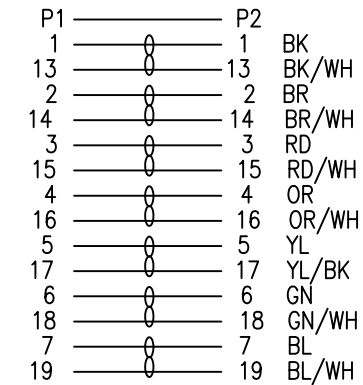

SHELL _____ SHELL(BRAID + DRAIN WIRE)

P2 CN24M

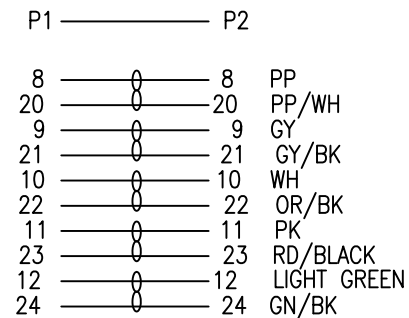

> 1 PAIR

NOTE:

- CABLE: UL2464 28AWG*12P+AEB. PVC JACKET BEIGE(BG02), OD:8.5±0.15mm.
- CONNECTOR: P1 AND P2 : CENTRONICS 24PIN MALE: SOLDER ASSY TRADITION TYPE, GOLD FLASH CONTACTS. BLUE PBT INSULATION,W/METAL SHELL AND THIMBLE(OD:10mm).
- PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON POLYBAG.
- 100% ELECTRICAL TESTING.

MERCHANDISE MOQ	EACH 50PCS			
LEAD TIME	14 DAY			
CABLE MOQ	EACH 3000M			
CONNECTOR MOQ	EACH 1000PCS			
NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/26/13			
TITLE	CN24M TO CN24M			
PART NO.	C24PP-MXXXX			