


P1 CN36M

P/N	X(M)	L(MM)	TOLERANCE(MM)
C36P-M0050	0.5	500	+25/-0
C36P-M0100	1	1000	+25/-0
C36P-M0150	1.5	1500	+50/-0
C36P-M0200	2	2000	+50/-0
C36P-M0300	3	3000	+50/-0
C36P-M0500	5	5000	+50/-0

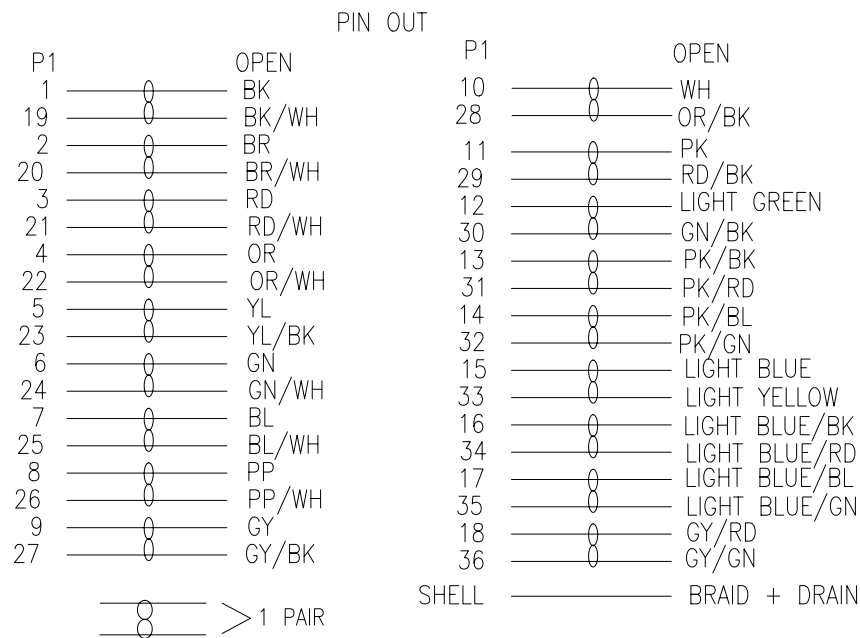

NOTE:

1. CABLE: UL2464 28AWG*18P+AEB. PVC JACKET BEIGE(BG-02), OD:9.0±0.15MM.
2. CONNECTOR: P1:CENTRONICS 36PIN MALE: SOLDER ASSY TRADITION TYPE, GOLD FLASH CONTACTS. BLUE PBT INSULATION,W/METAL SHELL AND THIMBLE(OD:13MM).
- 3.PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON POLYBAG.
- 4.100% ELECTRICAL TESTING.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/13/04			
TITLE				
CN36M TO OPEN				
PART NO.				
C36P-MXXXX				