



P/N	X(M)	L(MM)	TOLERANCE(MM)
C50PP-M0050	0.5	500	+25/-0
C50PP-M0100	1	1000	+25/-0
C50PP-M0150	1.5	1500	+50/-0
C50PP-M0200	2	2000	+50/-0
C50PP-M0300	3	3000	+50/-0
C50PP-M0500	5	5000	+50/-0

PIN OUT

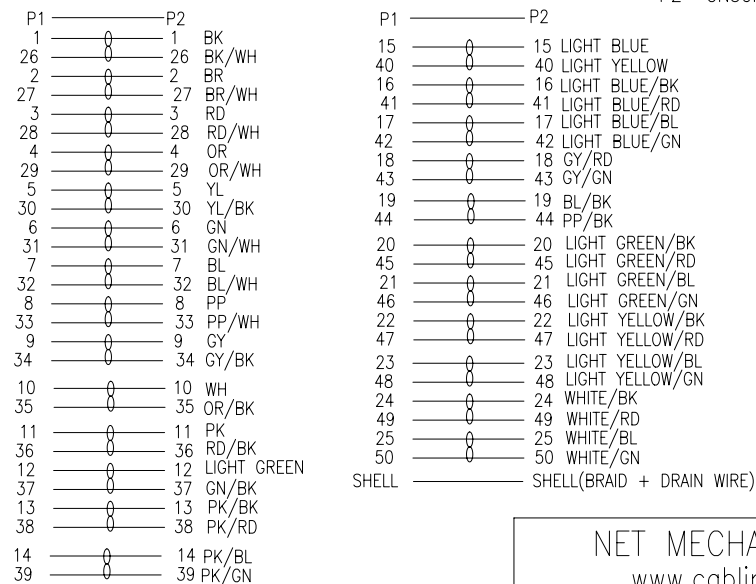

NOTE:

1. CABLE: UL2464 28AWG*25P+AEB.PVC JACKET BEIGE(BG-02), OD:10.5±0.15MM.
2. CONNECTOR: P1 AND P2:CENTRONICS 50PIN MALE: SOLDERASSY TRADITION TYPE, GOLD FLASHCONTACTS.BLUE PBT INSULATION,W/METAL SHELL AND THIMBLE(OD:13MM).
- 3.PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE STAMPED ON POLYBAG.
- 4.100% ELECTRICAL TESTING.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/13/04			
TITLE				
CN50M TO CN50M				
PART NO.				
C50PP-MXXXX				