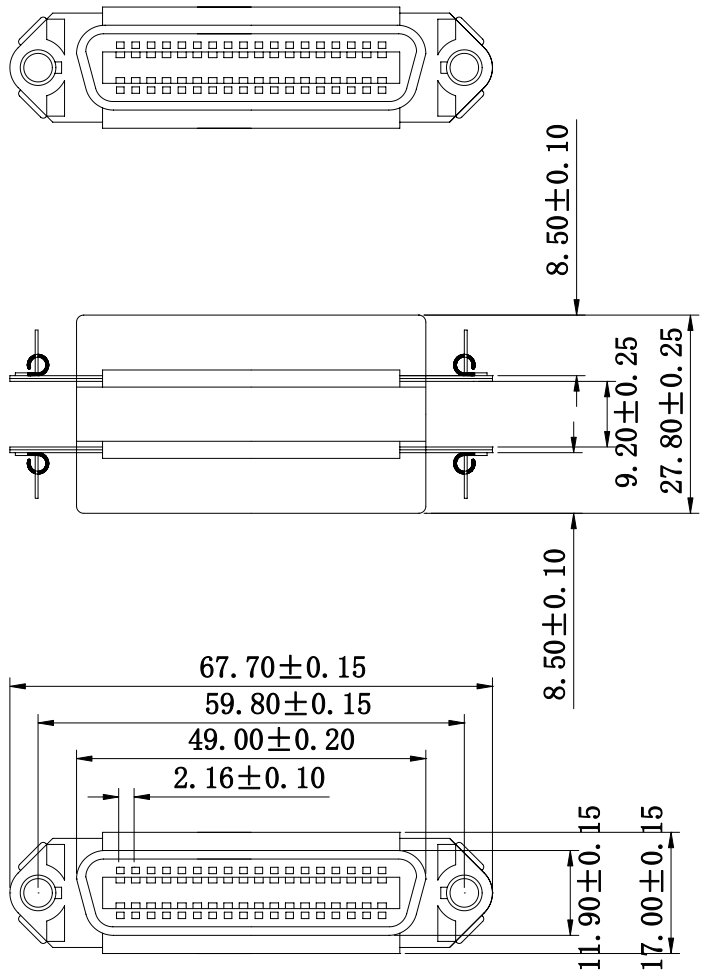



PIN OUT: 36Female 36Female

1	----------	1
2	----------	2
3	----------	3
4	----------	4
35	----------	35
36	----------	36
G	----------	G

SPECIFICATION
INSULATOR:PBT Glass fibre reinforced UL 94 VO
CONTACT:Brass
CONTACT PLATING:Gold plated over nickel
SHELL: NicKel Silver
CURRENT RATING: 3 AMP
DIELECTRIC STRENGTH: 500V AC for one minute
INSULATOR RESISTANCE: 500M?? min at 500V DC
TEMPERATURE:-25°C --- +105°C

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/13/04			
TITLE	CN36 F/F ADAPTER			
PART NO.	CG-36FF			