

P1 DB25M

M2.6 SHORT SCR(X4)


P2 DB25F

P/N	X(M)	L(MM)	TOLERANCE(MM)
D25PS-M0050-AA	0.5	500	+50/-0
D25PS-M0100-AA	1	1000	+75/-0
D25PS-M0150-AA	1.5	1500	+75/-0
D25PS-M0200-AA	2	2000	+75/-0
D25PS-M0250-AA	2.5	2500	+75/-0
D25PS-M0300-AA	3	3000	+75/-0
D25PS-M0400-AA	4	4000	+75/-0
D25PS-M0500-AA	5	5000	+150/-0
D25PS-M1000-AA	10	10000	+150/-0

NOTE:

- CABLE:UL2464 28AWG X 13P+AL/MY+DRAIN+BRAID,PVC JACKET, COLOR:BEIGE(BG-02), $\phi 8.5 \pm 0.15$ mm.
- CONN.:P1:D-SUB 25PIN MALE: SOLDER TYPE,BLACK PBT INSULATION, GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.
P2:D-SUB 25PIN FEMALE:SOLDER TYPE,BLACK PBT INSULATION, GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.
- $\phi 1.0 \times 10$ MM BLACK HEAT SHRINK TUBING.
- $\phi 9.0 \times 20$ MM BLACK HEAT SHRINK TUBING.
- $\phi 1.5 \times 25$ MM BLACK HEAT SHRINK TUBING.
- D-SUB 25P HOOD.
- TESTING:100% ELECTRICAL TEST.
- PACKING:EACH CABLE IN A POLY-BAG.

PIN OUT:

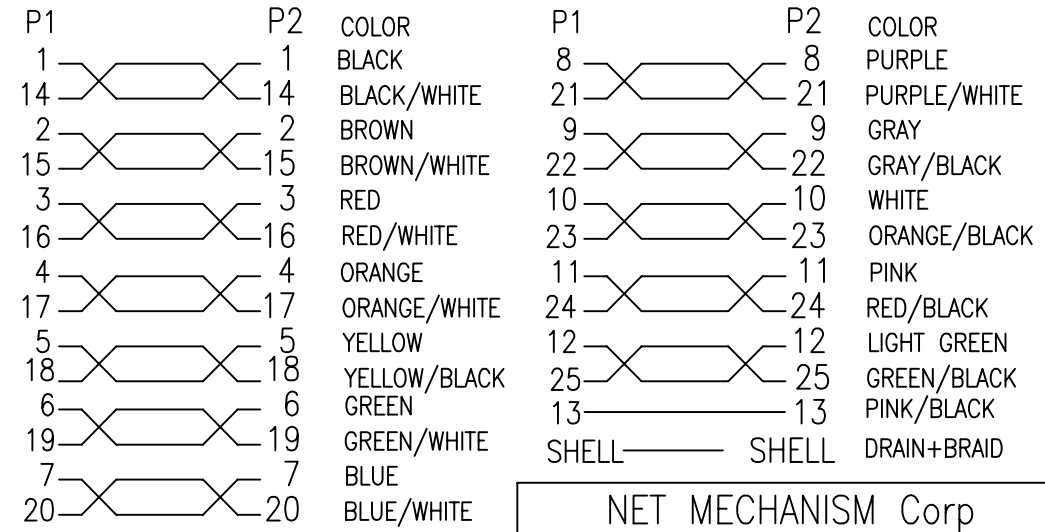

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	07/10/08			
TITLE DB25M TO DB25F				
PART NO. D25PS-MXXXX-AA				