

P1 DB25M

#4-40UNC SHORT SCR(X4)


P2 DB25F

P/N	X(M)	L(MM)	TOLERANCE(MM)
D25PS-M0050-CC	0.5	500	+50/-0
D25PS-M0100-CC	1	1000	+75/-0
D25PS-M0150-CC	1.5	1500	+75/-0
D25PS-M0200-CC	2	2000	+75/-0
D25PS-M0250-CC	2.5	2500	+75/-0
D25PS-M0300-CC	3	3000	+75/-0
D25PS-M0400-CC	4	4000	+75/-0
D25PS-M0500-CC	5	5000	+150/-0
D25PS-M1000-CC	10	10000	+150/-0

NOTE:

- 1.CABLE:UL2464 28AWG X 13P+AL/MY+DRAIN+BRAID,PVC JACKET, COLOR:BEIGE(BG02), $\phi 8.5 \pm 0.15$ mm.
- 2.CONN.:P1:D-SUB 25PIN MALE: SOLDER TYPE,BLACK PBT INSULATION, GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM. P2:D-SUB 25PIN FEMALE:SOLDER TYPE,BLACK PBT INSULATION, GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.
3. $\phi 1.0 \times 10$ mm BLACK HEAT SHRINK TUBING.
4. $\phi 10.0 \times 20$ mm BLACK HEAT SHRINK TUBING.
5. $\phi 1.5 \times 25$ mm BLACK HEAT SHRINK TUBING.
- 6.D-SUB 25P HOOD.
- 7.TESTING:100% ELECTRICAL TEST.
- 8.PACKING:EACH CABLE IN A POLY-BAG.

PIN OUT:

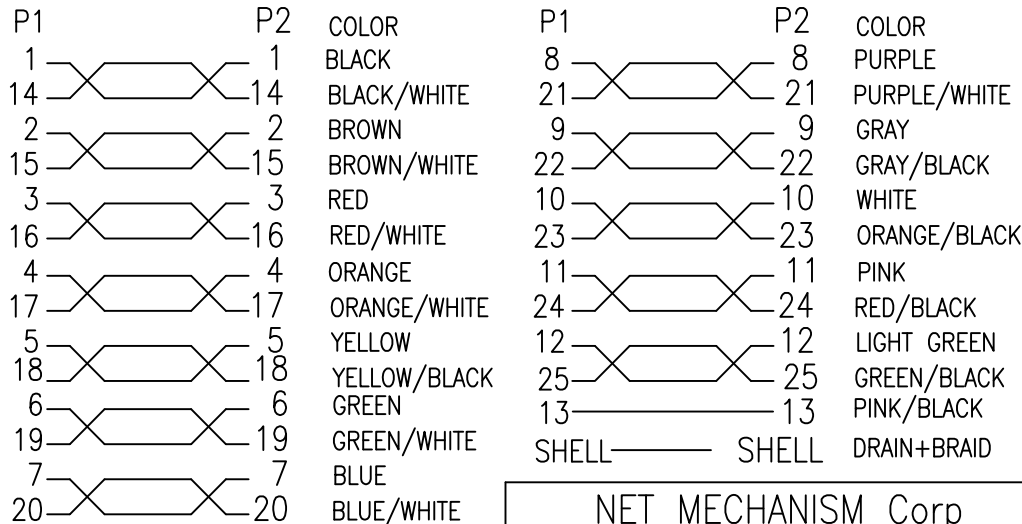

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	C
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/05/13			
TITLE				
DB25M TO DB25F				
PART NO.				
D25PS-MXXXX-CC				