
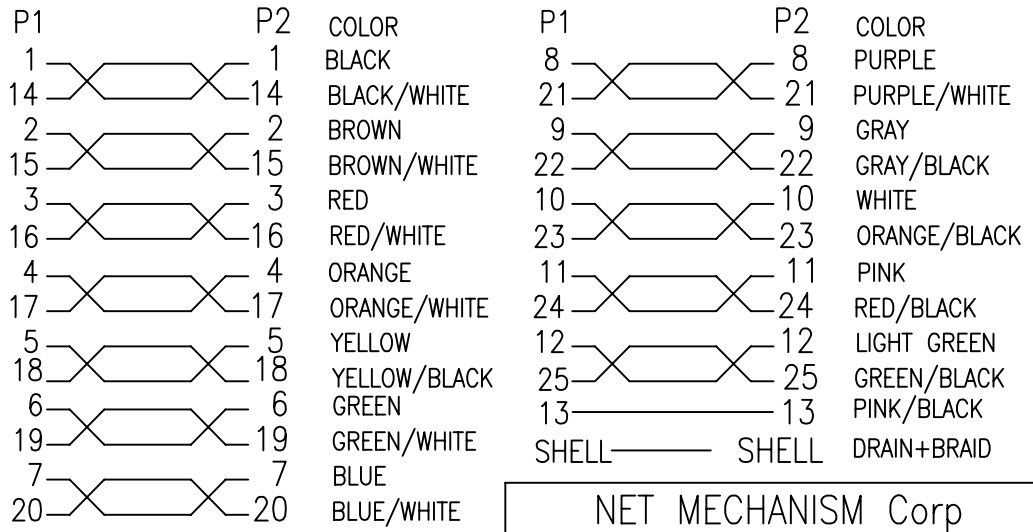


P/N	X(M)	L(MM)	TOLERANCE(MM)
D25SS-M0050-AA	0.5	500	+50/-0
D25SS-M0100-AA	1	1000	+75/-0
D25SS-M0150-AA	1.5	1500	+75/-0
D25SS-M0200-AA	2	2000	+75/-0
D25SS-M0250-AA	2.5	2500	+75/-0
D25SS-M0300-AA	3	3000	+75/-0
D25SS-M0400-AA	4	4000	+75/-0
D25SS-M0500-AA	5	5000	+150/-0
D25SS-M1000-AA	10	10000	+150/-0

PIN OUT:



- NOTE:
- CABLE:UL2464 28AWG X 13P+AL/MY+DRAIN+BRAID,PVC JACKET, COLOR:BEIGE(BG-02), $\phi 8.5 \pm 0.15$ mm.
 - CONN.:P1, P2:D-SUB 25PIN FEMALE:SOLDER TYPE,BLACK PBT INSULATION, GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.
 - $\phi 1.0 \times 10$ MM BLACK HEAT SHRINK TUBING.
 - $\phi 9.0 \times 20$ MM BLACK HEAT SHRINK TUBING.
 - $\phi 1.5 \times 25$ MM BLACK HEAT SHRINK TUBING.
 - D-SUB 25P HOOD.
 - TESTING:100% ELECTRICAL TEST.
 - PACKING:EACH CABLE IN A POLY-BAG.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	07/10/08			
TITLE				
DB25F TO DB25F				
PART NO.				
D25SS-MXXXX-AA				