


P/N	X(M)	L(MM)	TOLERANCE(MM)
D37PS-M0050-CC	0.5	500	+50/-0
D37PS-M0100-CC	1	1000	+75/-0
D37PS-M0150-CC	1.5	1500	+75/-0
D37PS-M0200-CC	2	2000	+75/-0
D37PS-M0250-CC	2.5	2500	+75/-0
D37PS-M0300-CC	3	3000	+75/-0
D37PS-M0400-CC	4	4000	+75/-0
D37PS-M0500-CC	5	5000	+150/-0
D37PS-M1000-CC	10	10000	+150/-0

PIN OUT:

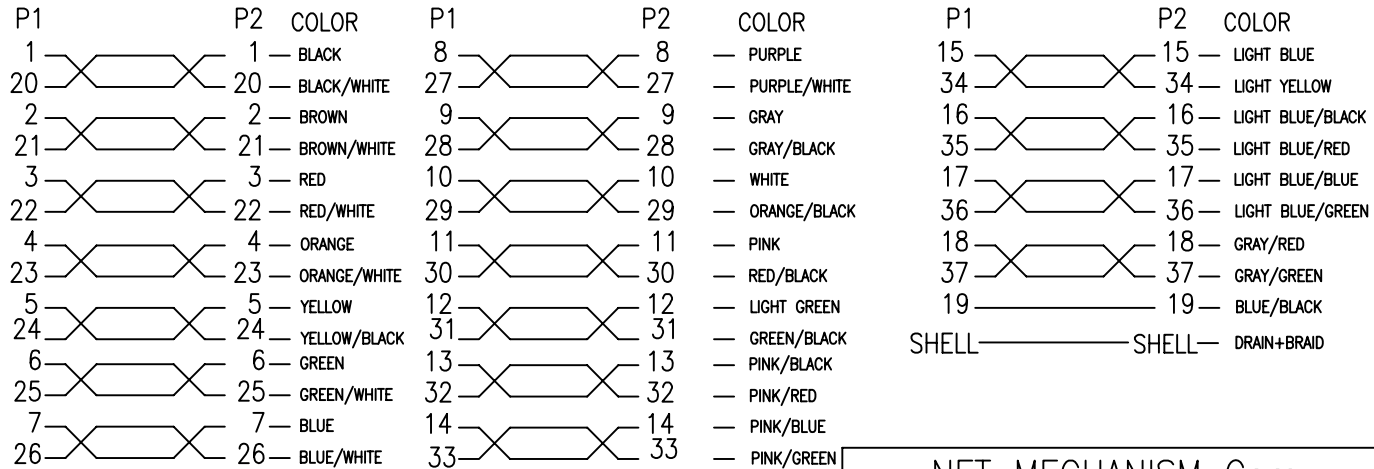

- NOTE:
- CABLE:UL2464 28AWG X 19P+AL/MY+DRAIN+BRAID,PVC JACKET,COLOR:BEIGE(BG-02), $\phi 9.5 \pm 0.15$ mm.
  - CONN.:P1:D-SUB 37PIN MALE: SOLDER TYPE,BLACK PBT INSULATION,GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.  
P2:D-SUB 37PIN FEMALE:SOLDER TYPE,BLACK PBT INSULATION, GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.
  - $\phi 1.0 \times 10$ MM BLACK HEAT SHRINK TUBING.
  - $\phi 10.0 \times 25$ MM BLACK HEAT SHRINK TUBING.
  - $\phi 1.5 \times 30$ MM BLACK HEAT SHRINK TUBING.
  - D-SUB 37P HOOD.
  - TESTING:100% ELECTRICAL TEST.
  - PACKING:EACH CABLE IN A POLY-BAG.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	07/10/08			
TITLE				
DB37M TO DB37F				
PART NO.				
D37PS-MXXXX-CC				