


| P/N | X(M) | L(MM) | TOLERANCE(MM) |
|----------------|------|-------|---------------|
| D37SS-M0050-CC | 0.5 | 500 | +50/-0 |
| D37SS-M0100-CC | 1 | 1000 | +75/-0 |
| D37SS-M0150-CC | 1.5 | 1500 | +75/-0 |
| D37SS-M0200-CC | 2 | 2000 | +75/-0 |
| D37SS-M0250-CC | 2.5 | 2500 | +75/-0 |
| D37SS-M0300-CC | 3 | 3000 | +75/-0 |
| D37SS-M0400-CC | 4 | 4000 | +75/-0 |
| D37SS-M0500-CC | 5 | 5000 | +150/-0 |
| D37SS-M1000-CC | 10 | 10000 | +150/-0 |

PIN OUT:

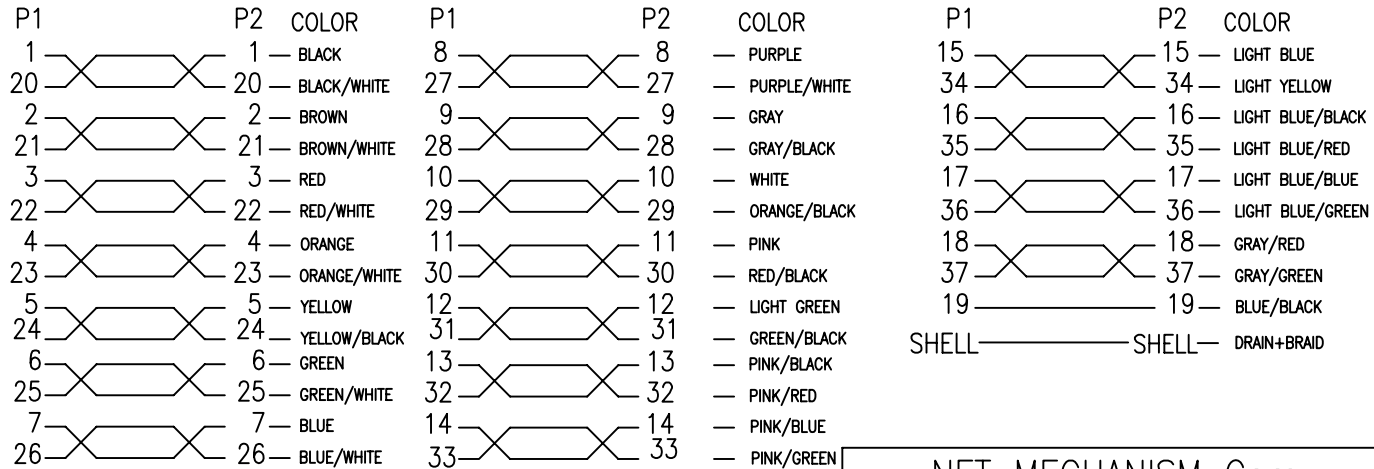

NOTE:

- 1.CABLE:UL2464 28AWG X 19P+AL/MY+DRAIN+BRAID,PVC JACKET,COLOR:BEIGE(BG-02),ø9.5±0.15mm.
- 2.CONN.:P1,P2:D-SUB 37PIN FEMALE: SOLDER TYPE,BLACK PBT INSULATION,GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.
- 3.ø1.0*10MM BLACK HEAT SHRINK TUBING.
- 4.ø10.0*25MM BLACK HEAT SHRINK TUBING.
- 5.ø1.5*30MM BLACK HEAT SHRINK TUBING.
- 6.D-SUB 37P HOOD.
- 7.TESTING:100% ELECTRICAL TEST.
- 8.PACKING:EACH CABLE IN A POLY-BAG.

| | | | | |
|--|----------|---------|-----|---|
| NET MECHANISM Corp www.cabling-ol.net | | | | |
| SCALE | NONE | | REV | B |
| UNIT | MM | | | |
| SHEET | 1/1 | DWG NO. | | |
| DATE | 07/10/08 | | | |
| TITLE DB37F TO DB37F | | | | |
| PART NO. D37SS-MXXXX-CC | | | | |