


P/N	X(M)	L(MM)	TOLERANCE(MM)
D9P-M0050-AG	0.5	500	+25/-0
D9P-M0100-AG	1	1000	+25/-0
D9P-M0150-AG	1.5	1500	+50/-0
D9P-M0200-AG	2	2000	+50/-0
D9P-M0250-AG	2.5	2500	+50/-0
D9P-M0300-AG	3	3000	+50/-0
D9P-M0400-AG	4	4000	+50/-0
D9P-M0500-AG	5	5000	+50/-0
D9P-M1000-AG	10	10000	+200/-0

PIN OUT:

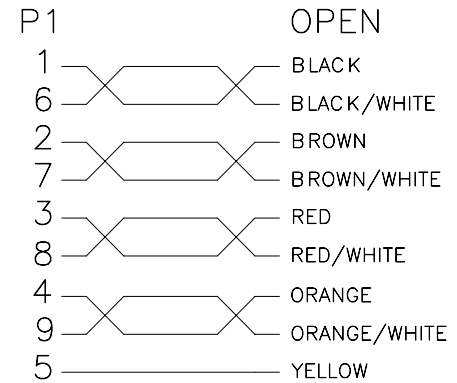

SHELL ———— DRAIN+BRAID

NOTE:

- 1.CABLE:UL2464 28AWG X 5P+AL/MY+DRAIN+BRAID,PVC JACKET, COLOR:BEIGE(BG-02),6.00.15mm.
- 2.CONN.:P1:D-SUB 9PIN MALE: SOLDER TYPE,BLACK PBT INSULATION, GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.
- 3.1.0*10MM BLACK HEAT SHRINK TUBING.
- 4.7.0*15MM BLACK HEAT SHRINK TUBING.
- 5.1.5*30MM BLACK HEAT SHRINK TUBING.
- 6.D-SUB 9P HOOD.
- 7.TESTING:100% ELECTRICAL TEST.
- 8.PACKING:EACH CABLE IN A POLY-BAG.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	07/09/05			
TITLE				
DB9M TO OPEN				
PART NO.				
D9P-MXXXX-AG				