


| P/N | X(M) | L(MM) | TOLERANCE(MM) |
|--------------|------|-------|---------------|
| D9P-M0050-CG | 0.5 | 500 | +50/-0 |
| D9P-M0100-CG | 1 | 1000 | +75/-0 |
| D9P-M0150-CG | 1.5 | 1500 | +75/-0 |
| D9P-M0200-CG | 2 | 2000 | +75/-0 |
| D9P-M0250-CG | 2.5 | 2500 | +75/-0 |
| D9P-M0300-CG | 3 | 3000 | +75/-0 |
| D9P-M0400-CG | 4 | 4000 | +75/-0 |
| D9P-M0500-CG | 5 | 5000 | +150/-0 |
| D9P-M1000-CG | 10 | 10000 | +150/-0 |

PIN OUT:

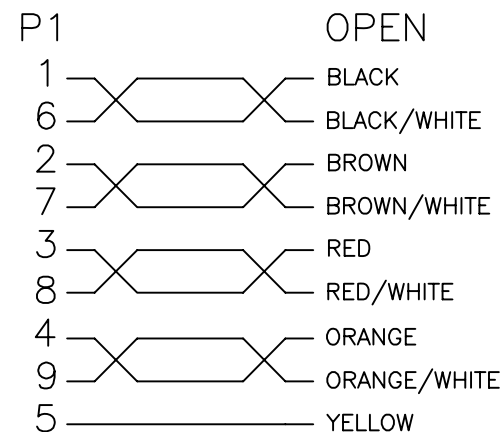

SHELL ————— DRAIN+BRAID

NOTE:

- 1.CABLE:UL2464 28AWG X 5P+AL/MY+DRAIN+BRAID,PVC JACKET, COLOR:BEIGE(BG-02), $\phi 6.0 \pm 0.15$ mm.
- 2.CONN.:P1:D-SUB 9PIN MALE: SOLDER TYPE,BLACK PBT INSULATION, GOLD FLASH CONTACTS,SHELL NICKEL PLATED ON TOP AND TIN PLATED ON BOTTOM.
3. $\phi 1.0 \times 10$ MM BLACK HEAT SHRINK TUBING.
4. $\phi 7.0 \times 15$ MM BLACK HEAT SHRINK TUBING.
5. $\phi 1.5 \times 30$ MM BLACK HEAT SHRINK TUBING.
- 6.D-SUB 9P HOOD.
- 7.TESTING:100% ELECTRICAL TEST.
- 8.PACKING:EACH CABLE IN A POLY-BAG.

| | | | | |
|--------------------|----------|--------------|-----|---|
| NET MECHANISM Corp | | | | |
| www.cabling-ol.net | | | | |
| SCALE | NONE | | REV | B |
| UNIT | MM | | | |
| SHEET | 1/1 | DWG NO. | | |
| DATE | 07/02/08 | | | |
| TITLE | | DB9M TO OPEN | | |
| PART NO. | | D9P-MXXXX-CG | | |