


WIRE LIST:

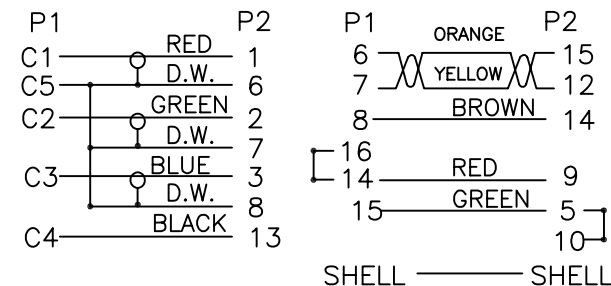

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
DDIS-AM15M-06	06	1829	+75/-0
DDIS-AM15M-10	10	3048	+75/-0
DDIS-AM15M-15	15	4572	+75/-0

NOTE:

- CABLE:UL20276(30AWG+B+JACKET)\*3COAX+28AWG\*1P+28AWG\*5C +AL/MY+DRAIN(BARE COPPER)+BRAID(A-M ALLOY),PVC JACKET BLACK OD:7.0±0.15MM
- CONN:P1 DVI 12+5 MALE,PIN:G/F,INSULATION BLACK, GOLD PLATED SHELL.  
P2 HDB15M,PIN:G/F,INSULATION BLACK, NICKEL PLATED SHELL.
- SCREW:#4-40UNC MOLDED BLACK.
- HOOD MOLDED 45P PVC BLACK.
- 100% ELECTRICAL TESTING:  
CONTACT RESISTANCE:2 OHM  
INSULATION RESISTANCE:50M OHM  
VOLTAGE:DC 500V

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/08/10			
TITLE				
DVI12+5/M TO HDB15/M				
PART NO.				
DDIS-AM15M-XX				