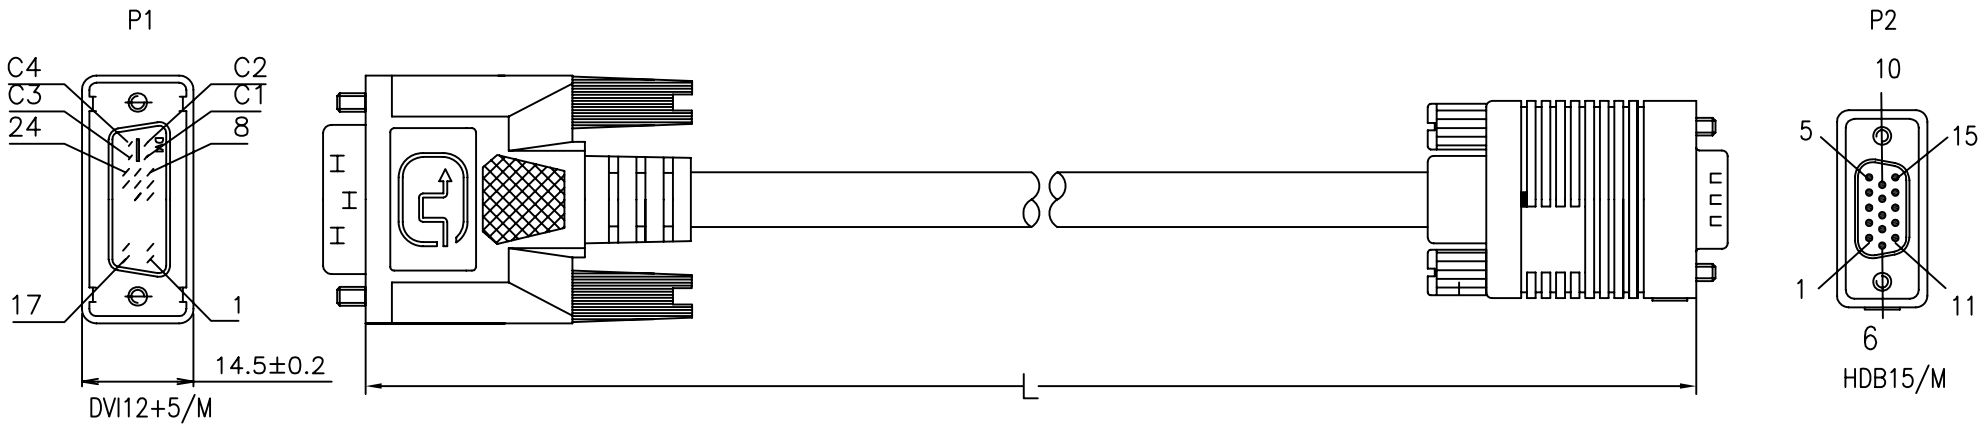

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
DDIS-AM15M-06	06	1829	+75/-0
DDIS-AM15M-10	10	3048	+75/-0
DDIS-AM15M-15	15	4572	+75/-0

WIRE LIST:

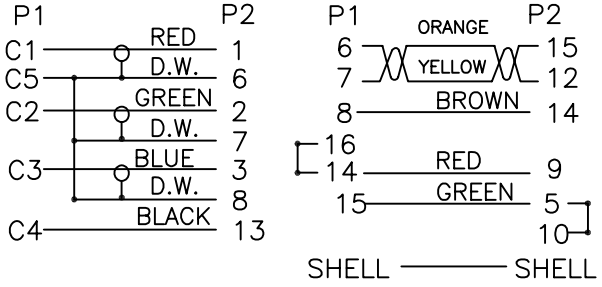

NOTE:

1. CABLE:UL20276(30AWG+B+JACKET)*3COAX+28AWG*1P+28AWG*5C
   +AL/MY+DRAIN(BARE COPPER)+BRAID(A-M ALLOY),PVC JACKET
   BLACK OD:7.0±0.15MM
2. CONN:P1 DVI 12+5 MALE,PIN:G/F,INSULATION BLACK,
   GOLD PLATED SHELL.
   P2 HDB15M,PIN:G/F,INSULATION BLACK,
   NICKEL PLATED SHELL.
3. SCREW:#4-40UNC MOLDED BLACK.
4. HOOD MOLDED 45P PVC BLACK.
5. 100% ELECTRICAL TESTING:
   CONTACT RESISTANCE:2 OHM
   INSULATION RESISTANCE:50M OHM
   VOLTAGE:DC 500V

NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	10/08/10		
TITLE	DVI12+5/M TO HDB15/M		
PART NO.	DDIS-AM15M-XX		