


P/N	XX(FT)	L(MM)	TOLERANCE(MM)
DDIS-AM15M-06	06	1829	+75/-0
DDIS-AM15M-10	10	3048	+75/-0
DDIS-AM15M-15	15	4572	+75/-0

WIRE LIST:

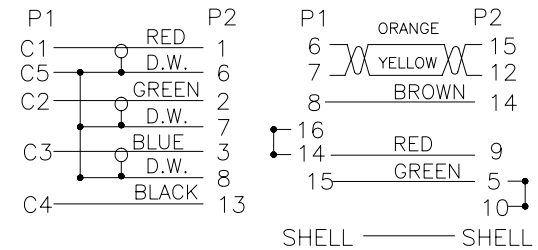

NOTE:

- CABLE:UL20276 (30AWG+B+JACKET)\*3COAX+28AWG\*1P+28AWG\*5C+AEB+PVC JACKET:BLACK OD=7.0 ± 0.15MM
- CONN: P1 DVI 12+5 MALE, PIN: G/F, INSULATION BLACK, GOLD PLATED SHELL.  
P2 HDB15M, PIN: G/F, INSULATION BLACK, NICKEL PLATED SHELL.
- SCREW: #4-40UNC MOLDED BLACK.
- HOOD MOLDED 45P PVC BLACK.
- 100% ELECTRICAL TESTING:  
CONTACT RESISTANCE: 2 OHM  
INSULATION RESISTANCE: 50M OHM  
VOLTAGE: DC 500V

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	06/21/05			
TITLE DVI12+5/M TO HDB15/M				
PART NO. DDIS-AM15M-XX				