


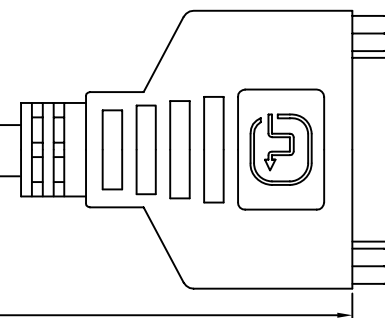
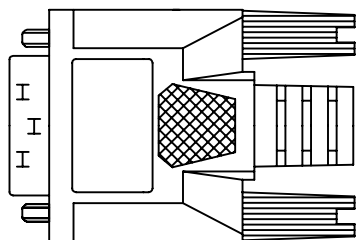


P1

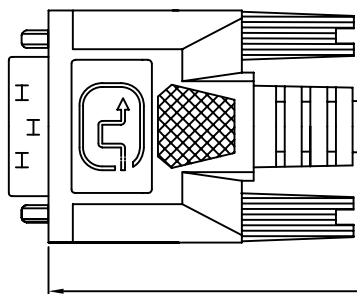

P2

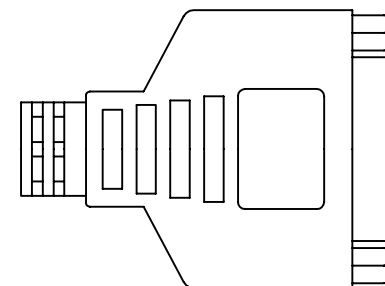


WIRE LIST:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
DDIS-DMDF-06	06	1829	+75/-0
DDIS-DMDF-10	10	3048	+75/-0
DDIS-DMDF-15	15	4572	+75/-0
DDIS-DMDF-25	25	7620	+150/-0

NOTE:

- CABLE:UL20276 (30AWG\*1P+D+AL/MY)\*7PCS+30AWG\*1P+30AWG\*3C +AL/MY+DRAIN(BARE COPPER)+BRAID(A-M ALLOY) PVC JACKET BLACK OD:8.2±0.15MM
- CONN:P1 DVI 24+1 MALE,PIN:G/F,INSULATION BLACK,GOLD PLATED SHELL.  
P2 DVI 24+1 FEMALE,PIN:G/F,INSULATION WHITE ASS'Y TYPE, GOLD PLATED SHELL.
- SCREW:#4-40UNC MOLDED BLACK.
- ALL HOOD MOLDED 45P PVC BLACK.
- TEST: 100% ELECTRICAL TESTING.
- MOLD NO: DVI-01, DVIF-01.

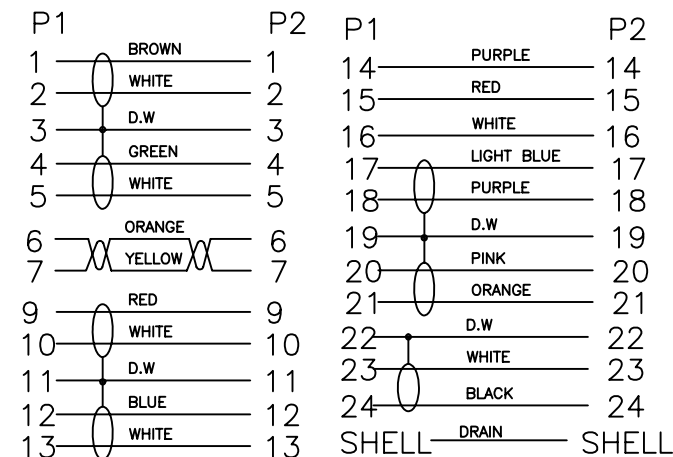

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/08/10			
TITLE				
DVI 24+1M TO DVI 24+1F				
PART NO.				
DDIS-DMDF-XX				