





P1

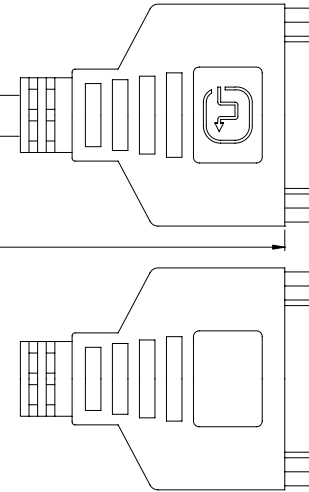

L



P2

WIRE LIST:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
DDIS-D MDF-06	06	1829	+75/-0
DDIS-D MDF-10	10	3048	+75/-0
DDIS-D MDF-15	15	4572	+75/-0

P1	P2	P1	P2
1 BROWN	1	14 PURPLE	14
2 WHITE	2	15 RED	15
3 D.W	3	16 WHITE	16
4 GREEN	4	17 LIGHT BLUE	17
5 WHITE	5	18 PURPLE	18
6 ORANGE	6	19 D.W	19
7 YELLOW	7	20 PINK	20
9 RED	9	21 ORANGE	21
10 WHITE	10	22 D.W	22
11 D.W	11	23 WHITE	23
12 BLUE	12	24 BLACK	24
13 WHITE	13	SHELL OUTER BRAID	SHELL

NOTE:

- CABLE:UL20276 (30AWG*1P+D+AL/MY)*7PCS+30AWG*1P+30AWG*3C+AEB+PVC
JACKET:BLACK; OD=8.2 ± 0.15MM
- CONN: P1 DVI 24+1 MALE, PIN: G/F, INSULATION BLACK, GOLD PLATED SHELL.
P2 DVI 24+1 FEMALE, PIN: G/F, INSULATION WHITE ASS'Y TYPE, GOLD PLATED SHELL.
- SCREW: #4-40UNC MOLDED BLACK.
- P1 HOOD MOLDED 45P PVC BLACK.
- 100% ELECTRICAL TESTING:
CONTACT RESISTANCE: 2 OHM
INSULATION RESISTANCE: 50M OHM
VOLTAGE: DC 500V

NET MECHANISM Corp			
www.cabling-ol.net			
SCALE	NONE		REV
UNIT	MM		A
SHEET	1/1	DWG NO.	
DATE	06/21/05	TITLE	
		DVI 24+1M TO DVI 24+1F	
PART NO.		DDIS-D MDF-XX	