


WIRE CONNECTION

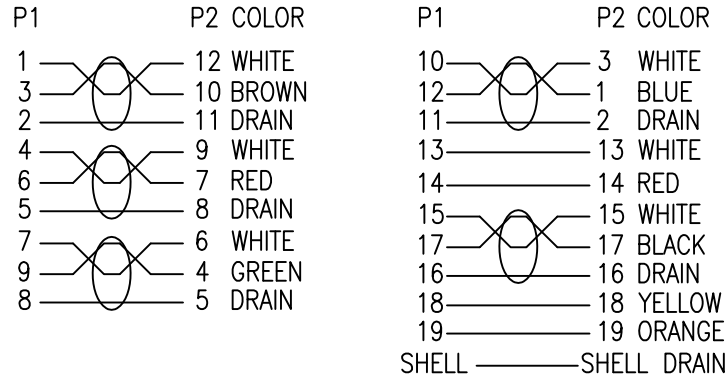

NOTE:

- CABLE:UL20276 (28AWG\*1P+D-AL-MYLAR)\*5C+28AWG\*4C+AL/MY +DRAIN(BARE COPPER)+BRAID(A-M ALLOY),PVC JACKET BLACK, OD:7.3±0.15mm.
- CONNECTOR:P1,P2:DISPLAYPORT 20P MALE, GOLD PLATED CONTACTS, INSULATION:BLACK, NICKEL PLATED SHELL, ASSEMBLY TYPE.
- DISPLAYPORT BLACK HOOD.
- SR MOLDING BLACK PVC.
- MOLD NO.: DISPLAYPORT-N01,DISPLAYPORT-SR.
- 100% OPEN AND SHORT TESTING.

P/N	L(MM)	T(MM)
DDIS-DPMDPM-M005	500	+50/-0
DDIS-DPMDPM-M01	1000	+75/-0
DDIS-DPMDPM-M02	2000	+75/-0
DDIS-DPMDPM-M03	3000	+75/-0

C	change of model	09/21/12
B	change of model	06/06/12
A	CHANGE FORMAT	10/18/10
REV	DESCRIPTION OF CHANGE	DATE

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE		REV	C
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	09/21/12			

TITLE DISPLAYPORT TO DISPLAYPORT

PART NO. DDIS-DPMDPM-MXX