

NOTE:

1. CABLE:UL20276 (24AWG*1P+D+AL/MY)*4PCS+ 24AWG*1P+24AWG*3C+AL/MY+DRAIN(BARE COPPER) +BRAID(A-M ALLOY),PVC JACKET BLACK OD:10±0.15MM
2. CONN:P1 & P2 DVI 18+1 SOLDER TYPE MALE, PIN:G/F,INSULATION BLACK,SHELL GOLD PLATED ON TOP AND TIN PLATED ON BOTTOM.
3. SCREW:#4-40UNC MOLDED WHITE.
4. HOOD MOLDED 45P PVC WHITE.
5. MOLD P/N:DVI-03.

WIRE LIST:

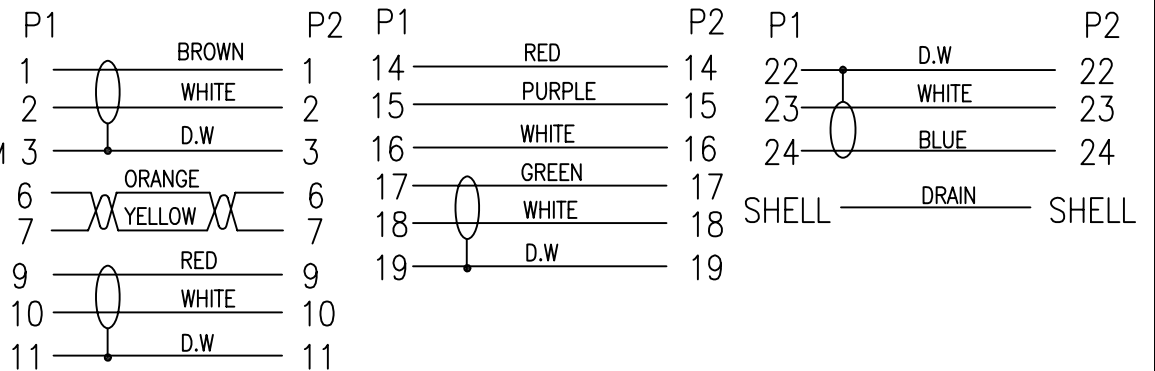


CHART:

P/N	XX(M)	L(MM)	TOLERANCE(MM)
DDIS-SDMSDM-M10	10	10000	+150/-0
DDIS-SDMSDM-M15	15	15000	+300/-0
DDIS-SDMSDM-M20	20	20000	+300/-0
DDIS-SDMSDM-M30	30	30000	+300/-0
DDIS-SDMSDM-M45	45	45000	+300/-0

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	C
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/20/10			
TITLE DVI 18+1M TO DVI 18+1M				
PART NO. DDIS-SDMSDM-MXX				