



HEXNUTS MUST BE REMOVABLE  
#4-40 NUT (X2)

UNC #4-40 Hexscrew

UNC #4-40 Hexnut

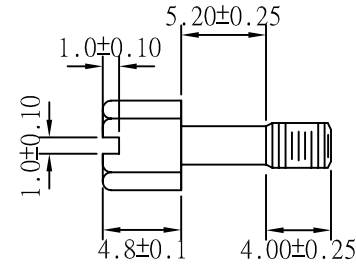

DGC 25 F/F GENDER CHANGER

PIN OUT: 25Female

25Female

1	-----	1
2	-----	2
}		
24	-----	24
25	-----	25
G	-----	G

Label: yellow color with black charactor

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000M  $\Omega$  min at 500V DC

TEMPERATURE:  $-55^{\circ}\text{C}$  ---  $+105^{\circ}\text{C}$

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE		REV	C
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	02/01/10	TITLE		
		DB25F/F ADAPTER		
PART NO.		DG-25FF-440		