



UNC #4-40X3.3mm
(THREAD)

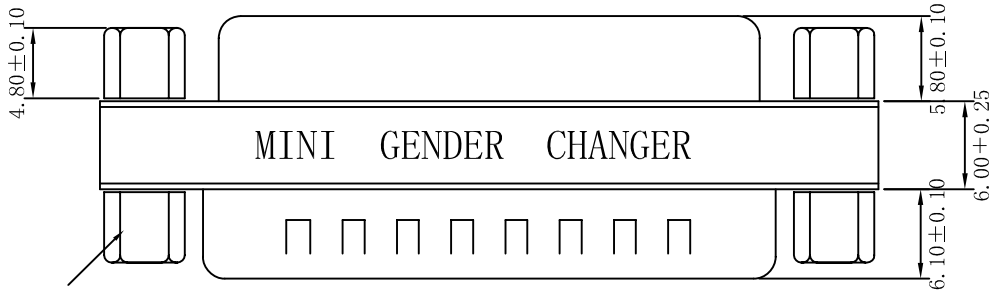



UNC #4-40

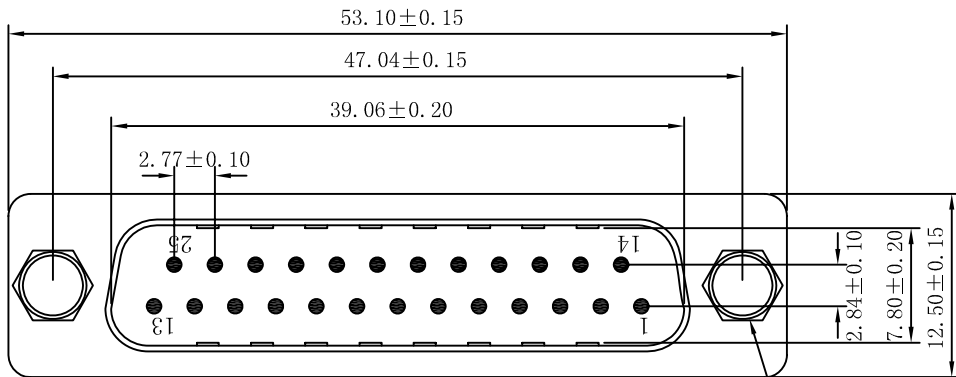

HEXNUTS MUST BE REMOVABLE
#4-40 NUT (X2)

UNC #4-40 Hexscrew

UNC #4-40 Hexnut



DGC 25 M/F GENDER CHANGER

PIN OUT: 25Male

25Female

1	-----	1
2	-----	2
24	-----	24
25	-----	25
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

GENDER
CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000M Ω min at 500V DC

TEMPERATURE: -55°C --- +105°C

NET MECHANISM Corp
www.cabling-ol.net

SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	02/01/10			
TITLE	DB25 M/F ADAPTER			
PART NO.	DG-25MF-440			