



UNC #4-40X3.3mm
(THREAD)

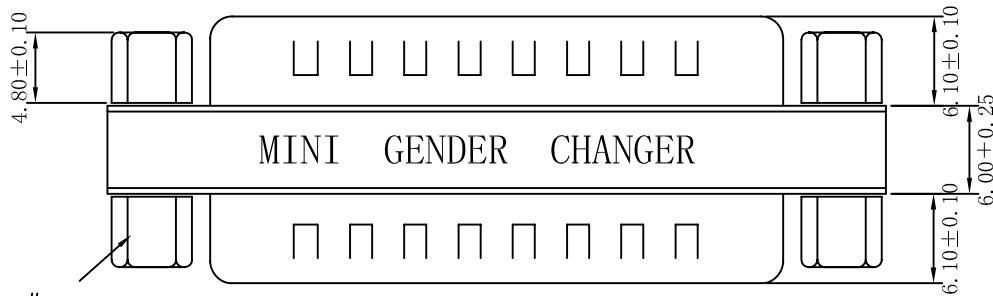


UNC #4-40

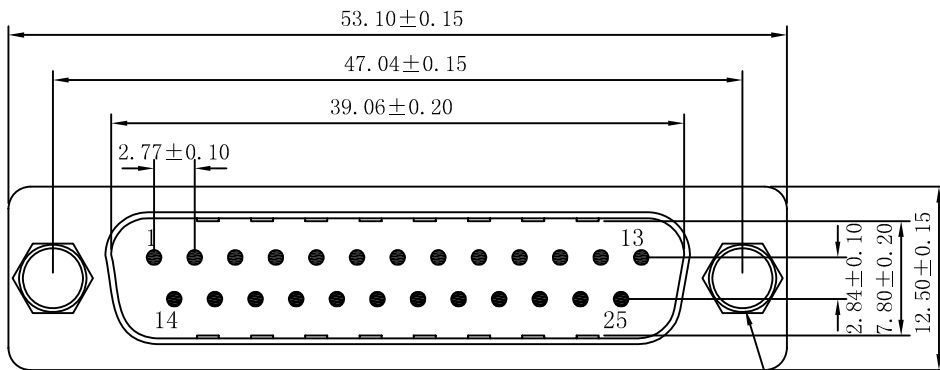


HEXNUTS MUST BE REMOVABLE
#4-40 NUT (X2)

UNC #4-40 Hexscrew



UNC #4-40 Hexnut



DGC 25 M/M GENDER CHANGER

PIN OUT: 25Male

25Male

1	-----	1
2	-----	2
	~~~~~	
24	-----	24
25	-----	25
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

GENDER  
CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell (Nickel Silver)

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000M Ω min at 500V DC

TEMPERATURE: -55°C --- +105°C

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	02/01/10			
TITLE				
DB25 M/M ADAPTER				
PART NO.				
DG-25MM-440				